

AppCenter™



WINDOWS MOBILE® ADMINISTRATOR GUIDE FOR MOTOROLA

Document Information

Version: 2.0

Revision: 3

Date: 7/8/2010

© 2009-2010, Odyssey Software, Inc. All Rights reserved. Athena and AppCenter are trademarks of Odyssey Software, Inc. Microsoft, Windows, Windows Mobile and ActiveSync are registered trademarks of Microsoft Corporation in the United States and other countries. Motorola is registered in the U.S. Patent and Trademark Office. Symbol, Spectrum24, and AirBEAM are registered trademarks of Symbol Technologies, Inc. Bluetooth is a trademark of Bluetooth SIG. Other product names or terminology may be trademarks or registered trademarks of their respective owners and are hereby acknowledged.

This document contains material that is proprietary of Odyssey Software, Inc. and is protected by copyright. Copying, reproducing, or disclosure of this document, or any part of this document is prohibited without the written permission of Odyssey Software, Inc.

Odyssey Software, Inc. shall not be held liable for technical or editorial errors, or for any consequential or incidental damages caused or allegedly caused by information contained in this document.

For specific information on the software or our packages, please contact us at support@odysseysoftware.com.

Table of Contents

1	Introduction	1-1
2	Installation.....	2-1
	Installation Procedures	2-1
	Upgrading from Previous AppCenter Versions	2-1
	Motorola WM 5/6.x Devices (Cold Boot Persistent)	2-2
	Motorola WM 5/6.x Devices (Clean Boot Persistent).....	2-3
3	User Mode.....	3-1
	Overview	3-1
	AppCenter Launch Screen	3-1
	Tools Menu.....	3-1
	About	3-2
4	Administration Mode.....	4-1
	Overview	4-1
	Configuring AppCenter.....	4-1
	Configuration Files	4-1
	Log File.....	4-2
	Command Line Options	4-3
	Accessing Administration Mode	4-5
	Administration Tools.....	4-7
	New Program.....	4-7
	Admin Logout	4-8
	Exit	4-8
	Restore Default Programs	4-9
	Administration Options	4-10
	Taskbar	4-11
	Taskbar(2)	4-15
	Title	4-16
	Time.....	4-17
	Signal.....	4-18
	Log	4-19
	Admin.....	4-20
	Browse	4-22
	Close	4-23
	Keys (Phone Devices)	4-24
	Security	4-26
	Phone (Windows Mobile 5 and above phone devices)	4-27
	Icons.....	4-29
	View	4-30
5	Adding Approved Programs	5-1
	Overview	5-1
	Pre-approved Applications and Functions	5-2
	Pre-Approved System Level Functions	5-2
	Pre-Approved Applications.....	5-3
	Adding New Programs Procedure	5-4

Editing and Deleting Approved Programs	5-7
Edit Program	5-7
Delete Program.....	5-8
Defining New Program Attributes	5-9
General.....	5-9
EXEs.....	5-10
Windows	5-12
Options.....	5-14
Options(2)	5-19
Startup	5-20
Connectivity	5-21
Appendix A Configuration Files	i
AppCenter Configuration (AppCenter.cfg).....	i
AppCenter User Configuration (AppCenter-User.cfg).....	i
System Options	i
Program Options	ix
Appendix B Sample Configuration	i
System Configuration Entry.....	i
AppCenter User Configuration File	ii

1 Introduction

AppCenter is an application used to restrict user activity on mobile devices to a set of authorized programs and configurations. AppCenter replaces the desktop graphical user interface of a device with a secure launch screen that displays only approved programs and options. Any unauthorized program that attempts to start (either automatically or by user control) is immediately terminated.

AppCenter can be configured to automatically launch approved programs at start up, for defined intervals, or in specific order. It can also be configured to disable the Windows Start Menu, on screen keyboard/SIP (Soft Input Panel), and other taskbar options.

AppCenter is intended for use on mobile devices where only specific programs are allowed to be used. It can be configured to lock users out of critical and sensitive areas of the device. For example, a kiosk application where the user can only run a specified information application. The application is auto-started whenever the kiosk hardware is rebooted or the application is terminated.

AppCenter works in two main modes: User Mode and Administration Mode. User Mode presents users with the AppCenter Launch Screen which lists applications that are approved for use. The user can only access the applications that are approved and configured for use. In Administration Mode, administrators can configure AppCenter by adding programs and enabling or disabling features for use.

Note: AppCenter is only for Windows Mobile Phone Edition or Windows Mobile devices and is not intended for use on SmartPhone devices.

This page intentionally left blank

2 Installation

This chapter discusses the installation procedures for Windows Mobile (WM) devices. AppCenter consists of several executable and configuration files. Some files are required to be loaded and/or created on the mobile device.

Installation Procedures

The installation procedures are used to install AppCenter on Windows Mobile devices. The installation is done by either copying the executable files (.exe) to a folder on the device or running an installation file (CAB). **Note:** Required files are created automatically during installation using CAB files.

AppCenter requires that only the AppCenter executable file (.exe) be present to initially launch AppCenter on a Motorola mobile device. When AppCenter runs for the first time it will create the AppCenter.cfg file which contains the default Administration password of *symbol*.

The initial launch will also create the AppCenter-User.cfg file which contains all the default pre-approved programs. The two configuration files will be created in the same folder as the AppCenter executable file unless the **-config** option has been used when launching AppCenter. See [Command Line Options](#) on page 4-3 for more information.

Upgrading from Previous AppCenter Versions

AppCenter configuration settings are located in a plain text-based configuration file (AppCenter-User.cfg). This file can be edited with any text editor and placed on a device to modify the configuration. If AppCenter is run on a device with a previous version of AppCenter (1.x), it will automatically read the AppCenter registry entries and dynamically create the appropriate AppCenter-User.cfg file.

If a change was made to the AppCenter configuration file and the file is placed on a device while AppCenter is still running, AppCenter must be restarted to enable the new configuration settings.

Any changes made using AppCenter Administration will be automatically saved to the configuration file and the application will be restarted.

Motorola WM 5/6.x Devices (Cold Boot Persistent)

The following procedures are used to install AppCenter on Motorola WM 5.x/6.x devices. WM 5.x and 6.x applications installed into volatile memory persist beyond a cold boot. For example, applications installed to dynamic storage other than Application, Platform or storage card folders will not survive a clean boot sequence.

Note: For WM 5.x and 6.x phone devices and other WM installations where signed CABs are required, AppCenter CAB files are not signed by default.

Install from Distribution CAB File

The following CAB files are available for the installation:

- AppCenter-WM5-MC9090.cab for MC9090 WM 5 devices
- AppCenter-PPC-2.0.cab for WM 5/6.x devices

Perform the following steps:

1. Locate the CAB file in the Windows Mobile 5-6\ARM folder and copy it to the \temp directory on the device. The CAB file includes both AppCenter and AppCenter Administration executables.

Note: For MC9090 devices running WM 5, use the *AppCenter-WM5-MC9090.cab* file. For all other WM 5/6.x devices, use the *AppCenter-PPC-2.0.cab*.

2. Tap the CAB file to start the installation process.
3. When prompted, select where to install AppCenter:
 - **\Device (default)**- installs AppCenter into a RAM storage memory location that can survive a cold boot.
 - **\Application (or \Cache Disk)**- installation to either of these folders may not prevent unauthorized access. At these locations, AppCenter may not install before other programs or applications in the cold boot sequence to prevent unauthorized activity.

Install from Distribution ZIP File Source

Perform the following procedure to install AppCenter on a Motorola Windows Mobile 5/6.x device:

1. Locate the Windows Mobile 5-6\ARM folder in the distribution source.
2. Copy the AppCenter.exe and optionally AppCenterAdmin.exe to the **\Application**, **\Device**, or **\Cache Disk** folder on the device.

Note: At the \Application or \Cache Disk locations, AppCenter may not install before other programs or applications in the cold boot sequence to prevent unauthorized activity.

3. Double-click the AppCenter executable to run the application.

Motorola WM 5/6.x Devices (Clean Boot Persistent)

For clean boot persistence on a Motorola WM 5 device, install AppCenter using either Option 1 or 2 in this section. For WM 6.x devices, install AppCenter using Option 1. **Note:** Access to the AppCenter distribution ZIP file source is required.

Option 1 Install from Distribution CAB File

WM 5 or WM 6.x Motorola Devices

Perform the following steps on WM 5 or WM 6.x Motorola devices except WM 5 MC70, MC9090, MC75, and MC55:

1. Locate the \Reset\WM5-6\Option1 folder in the ZIP file source.
2. Copy the Install-AppCenter.run file from the folder to the \Application\StartUp folder on the device.
3. Copy the AppCenter-PPC-2.0.cab file for the WM 5.x/6.x device to the \Temp folder on the device.
4. Copy any AppCenter saved preferences (AppCenter-User.cfg) file to the \Application folder. This file can be created from Administration Mode to save the current settings. The file will be saved to the \Application folder automatically.
5. Tap the CAB file to start the installation process.
6. Select the option for **\Application** when prompted.
7. Warm reset the device.
8. Warm reset the device a second time. The device will restart and AppCenter should be running.

WM 5 MC70, MC9090, MC75, and MC55 Motorola Devices

Perform the following steps on Motorola WM 5 MC70, MC9090, MC75, and MC55 devices only:

1. Copy the AppCenter-User.cfg, AppCenter.cfg, AppCenter.cpy, AppCenterAdmin and AppCenter (shortcuts) files from the \Reset folder to the \Application folder on the device.
2. Copy the AppCenterAdmin.exe and AppCenter.exe files from the Windows Mobile 5-6\ARM folder to the \Application folder on the device.
3. Tap the AppCenter-PPC-2.0.cab file to start the installation process.
Note: For MC9090 devices running WM 5, use the *AppCenter-WM5-MC9090.cab* file.
4. Select the option for **\Application** when prompted.
5. Perform a clean boot on the device. The device will restart and AppCenter should be running.

Option 2 Install with Individual Files from Distribution ZIP File Source

WM 5 Motorola Devices

Perform the following steps on WM 5 devices. **Note:** This option is not required for WM 6.x devices. Perform the following steps:

1. Locate the Windows Mobile 5-6\ARM folder in the distribution source.
2. Copy the AppCenter.exe and optionally the AppCenterAdmin.exe files to the \Application folder on the device.
3. Locate the \Reset\WM5-6\Option2 folder in the distribution source.
4. Copy AppCenter.run and RegMerge_PlatID.run to the \Application\StartUp folder on the device.
5. In the PlatformReg folder in the distribution source, locate the appropriate security registry file for the device. See the RegFile-Readme.txt file in the PlatformReg folder for information on what registry file is required for the device.
6. Rename the appropriate security registry file (.reg) for the device and operating system to AppCenterPlat.reg and then copy this renamed file to the \Application folder on the device.
7. Copy any AppCenter saved preferences file (AppCenter-User.cfg) to the \Application folder on the device. **Note:** This file can be created using AppCenter Administration and the file will be automatically saved to the \Application folder.
8. Warm reset or cold reset the device.

WM 2003 Motorola Devices

The following procedure is used to install AppCenter on a Motorola Windows Mobile 2003 device. **Note:** Access to the AppCenter distribution ZIP file source is required.

Perform the following steps:

1. Locate the appropriate files on the ZIP file source for the device operating system. For example, Pocket PC 2003 folder.
2. Copy the following files to the \Application folder on the device to make AppCenter cold boot persistent:
 - AppCenter.exe (Pocket PC 2003 folder)
 - AppCenterAdmin.exe (only required when using the AppCenter Administration Mode on the device for application configuration) (Pocket PC 2003 folder)
 - AppCenter.cfg

Note: If the AppCenter.cfg file is not located in the same directory as the executable(s), then the **-config** command line option is required.

3. Perform one of the following procedures (A or B):
 - A. Configure AppCenter using AppCenter Administration.OR
 - B. Use an existing AppCenter User Configuration by copying the AppCenter-User.cfg file.

Note: If the AppCenter-User.cfg file is not located in the same directory as the executable(s), then the **-config** command line option is required.

4. Copy the CPY file (AppCenter.cpy) in the \Reset folder to the \Application folder on the device.

The CPY file can be used during the cold boot process to copy AppCenter.exe, AppCenterAdmin application, and corresponding shortcuts to the recommended pre-existing folders on the device. The file will copy the AppCenter executable (.exe) files to the \Windows folder and shortcuts to the \Windows\StartUp and \Windows\Start Menu\Programs folders.

5. Copy the AppCenter and AppCenterAdmin shortcut files in the \Reset folder to the \Application folder on the device. The shortcut files are preset to launch AppCenter from the \Windows folder and instruct AppCenter to locate the configuration file in the \Application folder. Any changes made to the AppCenter configuration will be saved on a non-volatile partition and will survive subsequent cold boots.

This page intentionally left blank

3 User Mode

Overview


User Mode is the AppCenter interface that is visible to users. It provides controlled access to programs and device options from the AppCenter Launch Screen. The available programs and behavior of User Mode is configured by the administrator. AppCenter cannot be closed or shut down from User Mode.

AppCenter Launch Screen

The AppCenter Launch Screen is always active. The icons displayed on the screen include Windows icons or AppCenter controlled icons. If the taskbar is configured to contain the AppCenter Home icon, the user can toggle between an open application and the AppCenter Launch Screen by tapping the application and Home icons. Users can also switch between applications using the Smart Minimize button (done button) if configured for use. **Note:** The device arrow and enter keys can be used to select and access the available programs.


Tools Menu

The **Tools** menu contains **Admin Login** and **Exit** options. These selections may be disabled by the administrator. **About** is also included in this menu on Windows Mobile 2003 devices.

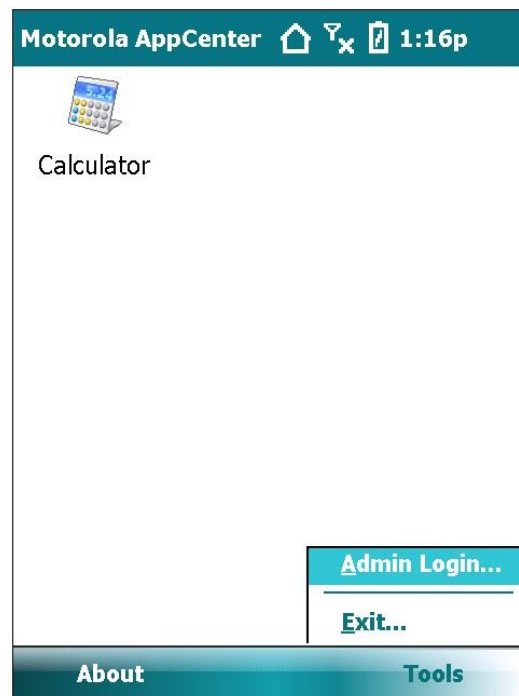


About

The **About** menu shows version and build information about the AppCenter application installed on the device.

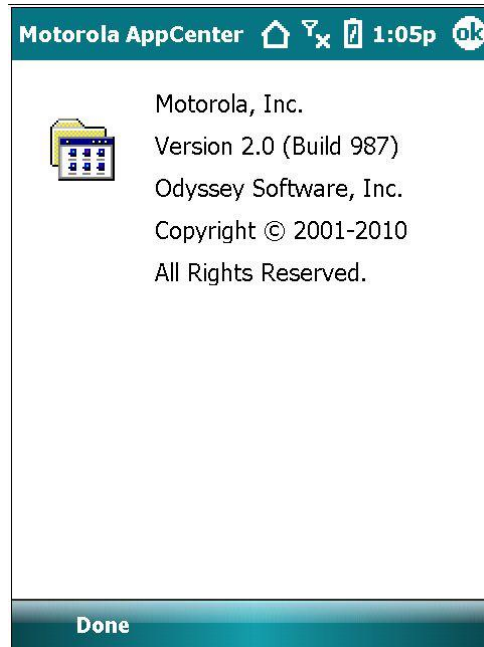

Note: On Windows Mobile 2003 devices, **About** appears in the Tools menu.

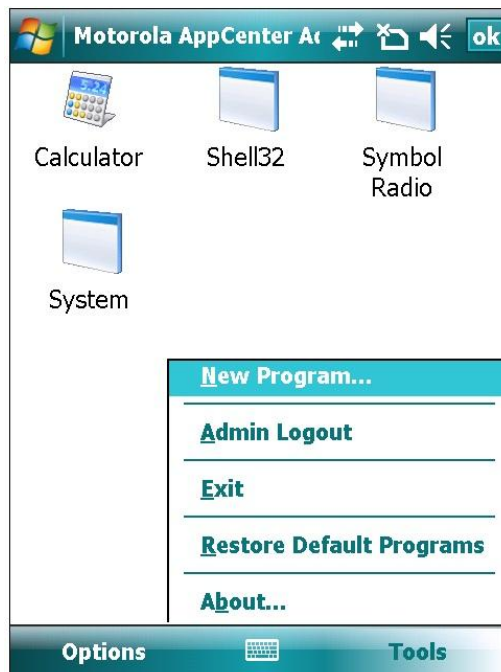

4 Administration Mode

Overview

Administration Mode provides access to the Administration Options and Tools. It is password protected to allow only administrator access. Administrators can add, change and/or remove programs from the list of approved programs, and configure the taskbar to display or hide the Windows Start Menu, AppCenter settings or device status information.

Configuring AppCenter

After the initial installation of AppCenter is complete, AppCenter is ready to be set up for use. Setup includes configuring AppCenter behavior, options and approved programs. The AppCenter configuration details are created and written to configuration files from the settings made in AppCenter Administration Mode. AppCenter application behavior, such as launching the application, can also be controlled using command line options.

Note: It is recommended to test configurations before deploying to cold boot environments as devices could be made inoperable because of a forgotten password or accidental deletion of a critical device process.

Configuration Files

The details of the configuration are contained in the configuration files (AppCenter.cfg and AppCenter-User.cfg). These files are located by default in the Program Files\Odyssey Software\AppCenter folder on the device. After installation, the files are created with specific default information determined during the initial run of AppCenter User Mode.

The configuration files are automatically edited by the AppCenter Administration Mode application during the program approval process and general AppCenter set up. The configuration files can be exported and placed on additional devices to replicate the configuration options on other devices. See [Appendix A Configuration Files](#) for more information about the configuration file entries and format.

Log File

The AppCenter Log File (AppCenter.log) is a text file located in Program Files\Odyssey Software\AppCenter on the device. This location can be changed using a command line option. The file can be accessed and read using a text editor. It also can be copied to other locations. During an AppCenter User Mode session, all access violations to the configuration are logged to the log file. See [Log](#) on page 4-19 for more information.

Each violation contained in the log file consists of the following:

- general description of the violation.
- date and time (PDT's time) when the violation occurred.
- process name of the offending process.
- Window Title of the unapproved window (if present).
- Window Class of the unapproved window (if present).
- Window Action of the last action the window attempted before it was stopped.

The following is a sample violation:

```
Unapproved window detected.  
11/26/08 1:08:49 PM  
ExeName = cprog.exe  
Title = Phone  
Class = Dialog  
Action = Close window
```

Command Line Options

Command line options can be specified when starting AppCenter. For example, to place the configuration files in non-volatile memory for cold boot recovery or log files in a subdirectory of \My Documents for easier location and access. Launching an application with command line arguments requires the creation of a shortcut and then editing the shortcut (.lnk file) to include the command line options.

The following arguments can be used when configuring AppCenter:

- **-terminate**– shuts down AppCenter and closes any applications that have the **AutoStop** option set. This option is ignored during AppCenter Administration Mode sessions.
- **-restart**– shuts down AppCenter and closes any applications that have the **AutoStop** option set. AppCenter is then restarted, and any applications that have the **AutoStart** option set are started. This option is ignored during AppCenter Administration Mode sessions.
- **-silent**– specifies whether AppCenter should display error messages on start up if the license key is missing, invalid or expired. When **-silent** is used, AppCenter shuts down without displaying an error message.
- **-config**– specifies the directory location of the AppCenter Administration Configuration File (AppCenter.cfg), the User-Defined Configuration File (AppCenter-User.cfg) and the location of the Log File (AppCenter.log). This option replaces the **-adminpath**, **-userpath**, **-logpath** and **-path** options.

Note: The file name(s) cannot be specified, only the path. If there are no command line arguments, all file locations are in the same folder as the AppCenter executables (Program Files\Odyssey Software\AppCenter\ AppCenter.exe and AppCenterAdmin.exe).

Examples:

-config \Storage Card\AppCenter\Config

Double quotes are used if the path contains spaces:

-config "\Program Files\AppCenter\Config"

Create a Shortcut

To create a shortcut, use either ActiveSync or Athena to copy an existing shortcut (i.e. AppCenter.Ink) to the PC for editing or create a new shortcut on the desktop.

The following is the shortcut format:

99#XXXXXXXXXXXXXXXXXXXXX

Where 99# is the number of alphanumeric characters (left justified),
is a literal constant, and XXX is the complete command line.

Any arguments in the command line that contain spaces must be enclosed in double quotes. **Note:** Multiple arguments cannot be enclosed within quotes as they will not be treated as separate arguments.

Example:

67#"\\Windows\\Start Menu\\Programs\\AppCenter.exe" -config "\\Application"

Accessing Administration Mode


To access Administration Mode:

1. Select the **AppCenterAdmin** icon from Windows File Explorer or the Programs folder.


OR

In User Mode, tap **Tools** and then tap **Admin Login**. **Note:** This access method may not be available as it can be disabled by an administrator.

2. The Admin Login screen appears. Enter the admin password. The default password is *symbol*. **Note:** It is recommended that this password be changed before deployment.

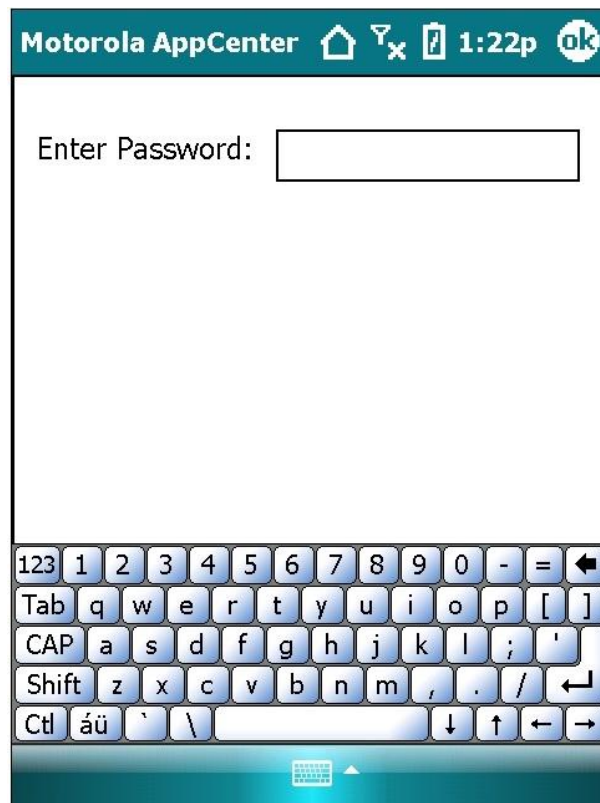


After successful log in, the Administration Mode Screen appears.

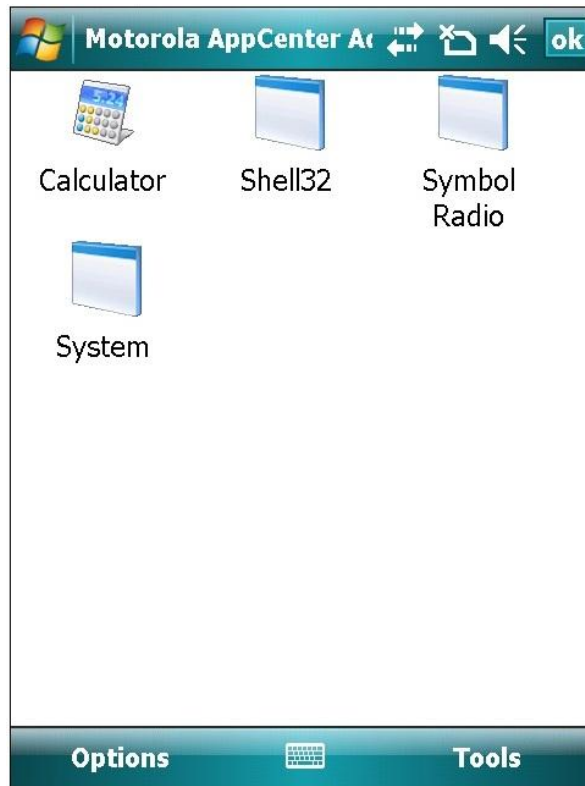

Administration Tools

The Tools menu contains selections for enabling programs for users, exiting Administration Mode and accessing AppCenter application information.

To access, tap **Tools** and then tap a menu item.

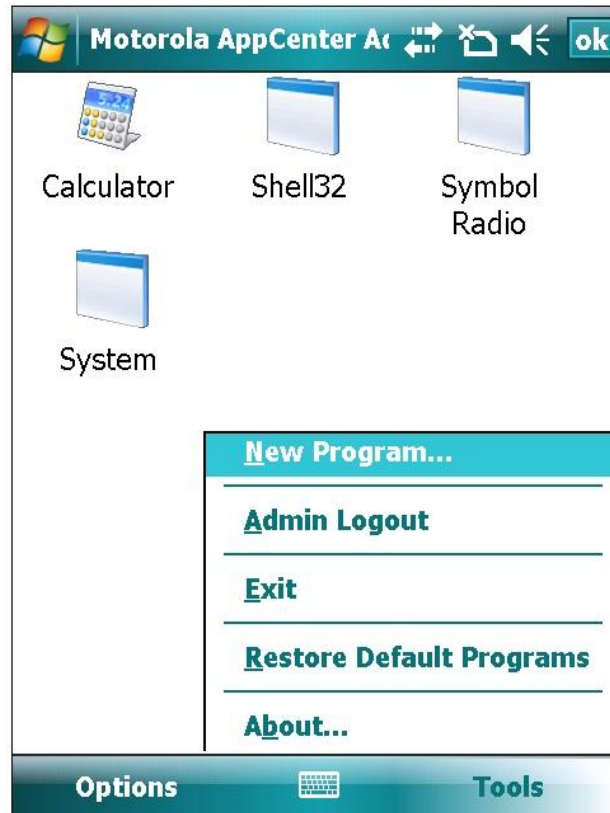

New Program

The **New Program** selection is used to add programs which display as icons to the user on the AppCenter Launch Screen, allow processes to run in the background, or enable processes from other approved programs. See [Adding Approved Programs](#) on page 5-1 for the procedure and information about adding programs.


Admin Logout

The **Admin Logout** selection exits Administration Mode and returns to the AppCenter Launch Screen.

Exit

The **Exit** selection will close both Administration and User Mode and return to the Windows Start (main) screen.


Tapping **ok** at the top right of the Administration screen also exits the application. At the following dialog, tap **Logout** to exit Administration Mode or **Exit** to exit AppCenter completely.

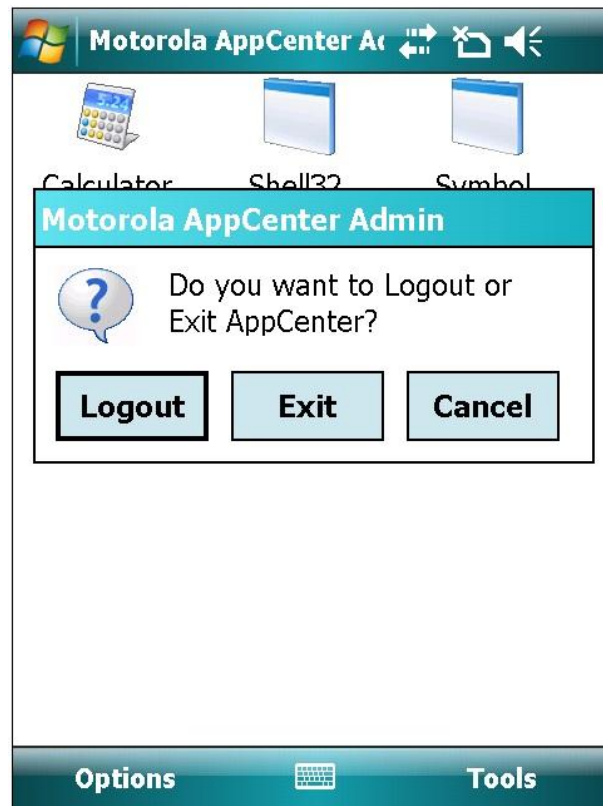

Restore Default Programs


The **Restore Default Programs** selection enables an administrator to undo all changes that were made during the session and revert the configuration back to the initial default (manufacturer) settings.

The confirmation dialog displays before the configuration settings are actually reset. Tap **Yes** to confirm the reset.

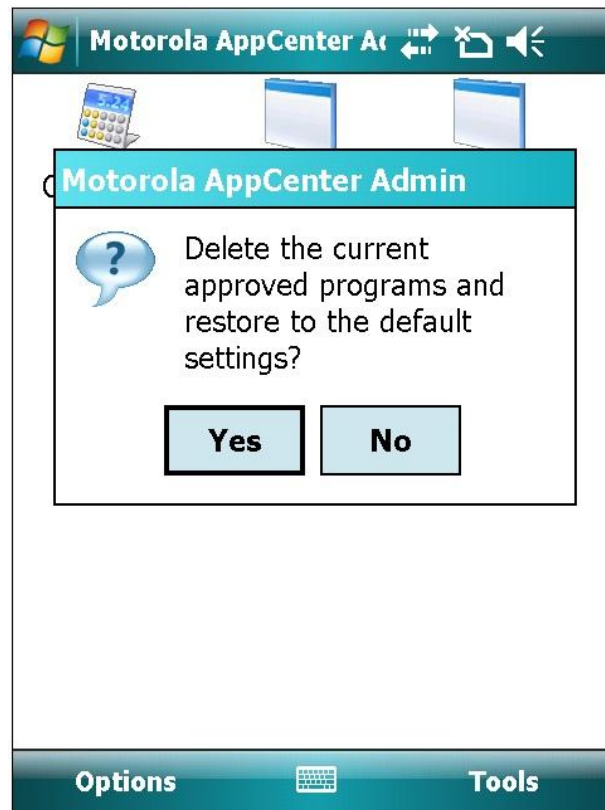


Administration Options

The **Options** menu is used to configure global AppCenter system-level settings, such as taskbar display and device status.

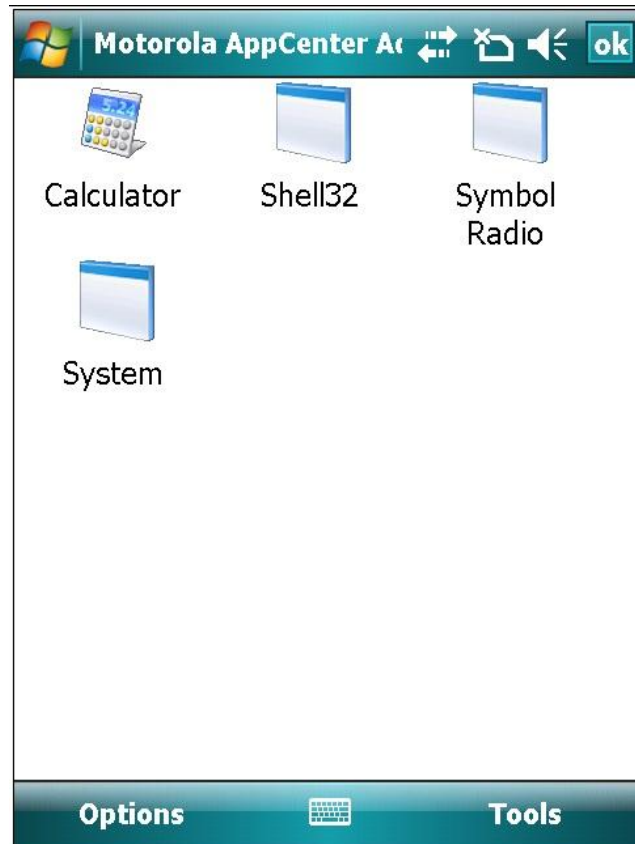

Taskbar

The Taskbar tab selections are displayed when **Options** is tapped. Taskbar controls the appearance of icons on the taskbar at the top of the AppCenter Launch Screen. The system-level settings are contained in tabbed panels which are selected by tapping the corresponding name: **Taskbar**, **Taskbar(2)**, **Title**, **Time**, **Signal**, **Log**, **Admin**, **Browse**, **Close**, **Keys**, **Security**, **Phone**, **Icons**, and **View**. The left and right arrows are used to scroll through the available settings.

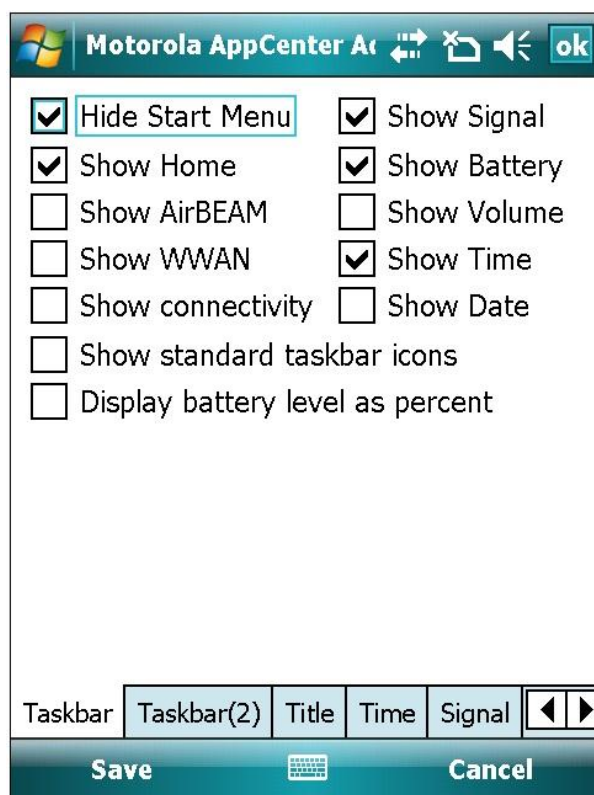

- **Hide Start Menu**- controls the appearance of AppCenter icons. When selected, the AppCenter icons display in the taskbar and the Windows Start Menu does not. **Note:** For Windows Mobile 6.5 devices, the done button is disabled and not actually removed from the task bar.

Example:

Hide Start Menu selected (enabled)



Hide Start Menu not selected (disabled)



- **Show Signal**- displays the wireless network signal strength icon.
- **Show Home**- displays the AppCenter home icon. The default is checked (enabled).
- **Show Battery**- displays the current battery strength/battery status icon. When selected, the following setting becomes active:
 - **Display battery level as percent**- displays a charge level percentage instead of an icon.
- **Show AirBeam**- displays the AirBEAM Safe status icon.
- **Show Volume**- displays the speaker volume icon which enables volume control. **Note:** On Windows Mobile 6.5 devices running Windows Mobile 6.5 builds prior to build 23034, **Show Volume** is not supported when used in conjunction with **Hide Start Menu**. To work around this, deselect **Show Volume** and **Volume keys allowed** on the Keys tab or enable **Show standard taskbar icons**.
- **Show WWAN**- displays the Wireless Wide Area Network strength icon for devices that support the Radio Interface Layer (RIL.DLL). **Note:** Displaying both WLAN and WWAN signal strength at the same time uses the same amount of taskbar area as displaying WLAN or WWAN signal strength individually.
- **Show Time**- displays the time of day. The default is selected (enabled).
- **Show connectivity**- (Windows Mobile 5 and above only) displays the network connectivity icon. Connections include ActiveSync, Ethernet cradle, WLAN, WWAN, Bluetooth, GPRS, 1XRTT, Edge, 3G, HSDPA, and EVDO.

- **Show Date**- displays the date. This setting can be used in conjunction with **Show Time** to display only the date, only the time, both or none. The date is displayed in the short format as specified in the device's Regional settings. The taskbar date and time are displayed in the same font as the title.
- **Show standard taskbar icons**- works with **Hide Start Menu** to control taskbar functions and appearance. When this setting is selected, AppCenter uses fewer CPU cycles because it does not track information such as signal strength and battery usage.

Note: The taskbar icons contain links to other programs. To allow user navigation to these programs, each program must be approved. See the [Adding New Programs Procedure](#) on page 5-4 for more information.

Example:


Show standard taskbar icons selected



Example:

The Taskbar Screen selections made in the following graphic, produce the AppCenter taskbar shown below it.

Task Bar Selections

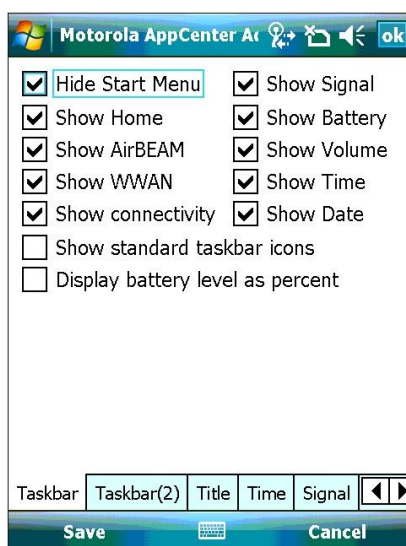

AppCenter Taskbar



Taskbar Icons

The following table shows the icons that can be displayed in the taskbar.


	Battery Charging		Battery Fully Charged		Battery Good		Battery Low
	Battery Very Low		Battery Status UNKNOWN		AirBEAM Status UNKNOWN		AirBEAM Status CONNECTED
	AirBEAM Status NOT CONNECTED		AirBEAM Status ROAMING	 or 	WLAN / Signal STRONG	 or 	WLAN / Signal GOOD
 or 	WLAN / Signal MEDIUM	 or 	WLAN / Signal FAIR	 or 	WLAN / Signal POOR	 or 	WLAN / Signal NO SIGNAL
	Return to AppCenter (HOME)		Speaker ON (Volume Up)		Speaker OFF (Volume Muted)	 or 	WWAN / Phone STRONG
 or 	WWAN / Phone GOOD	 or 	WWAN / Phone MEDIUM	 or 	WWAN / Phone FAIR	 or 	WWAN / Phone POOR
 or 	WWAN / Phone NO SIGNAL		Connectivity Icon				

Taskbar(2)

The Taskbar(2) tab controls the text, icons and taskbar background colors. Colors can be specified in decimal or hexadecimal format. See [Specifying Colors](#) on page 4-32 for more information.

The following colors can be specified for the taskbar:

- **Taskbar Color**- specifies the color of the taskbar and taskbar icons based on a Windows Mobile OS color scheme or a customized color scheme.
- **Text Color**- specifies the color of the text that displays in the taskbar.
- **Background Color**- specifies the color of the taskbar background.
- **Font size/Bold**- specifies the font size and weight for the taskbar title. Values in the range of 9-14 are recommended for best results. Values of 6-36 are allowed but may produce undesirable results. For example, depending on the enabled AppCenter taskbar options, a long title may not completely display in the AppCenter taskbar. Reducing the font size allows more of the title to appear. If a value outside the allowed range is used, the font size is reset to the default size (11).

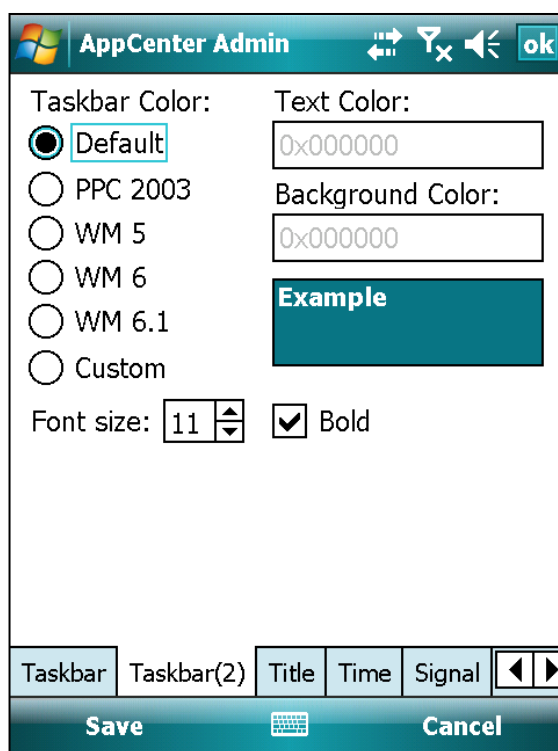

Title

The Title tab enables the creation of a custom title to display in the Launch Screen taskbar instead of the default AppCenter title.


- **Alternate Title**- enter the text for a custom title that will appear in the taskbar. This title overrides the default AppCenter title.
- **Display MAC address as title**- displays the device MAC address as the taskbar title. If a device does not have a MAC address, the AppCenter title appears.
- **Display IP address as title**- displays the device IP address as the taskbar title.

Example:



Note: The adapter name must be correct on all devices to display the MAC or IP address as the taskbar title.


- **Always use AppCenter title**- displays the current AppCenter title in all approved/accessible programs.

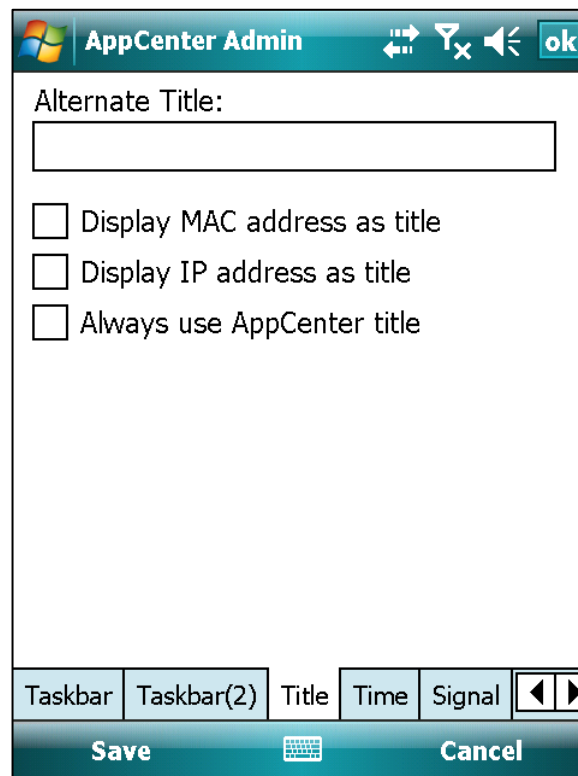

Time

The Time tab enables customization of the time displayed in the Launch Screen Taskbar. To enable this setting, **Show Time** must be selected in the Taskbar tab.


- **Default**- displays the hour (12 hour format) and time marker. For example, 11:59p.
- **24 hour**- displays the time in 24 hour format. For example, 23:59.
- **Use regional settings**- displays the time based on the current regional time. The following settings are enabled when **Use regional settings** is selected:
 - **Do not use a time marker (AM/PM)**- does not display AM/PM or international equivalents with the time.
 - **Always use 24 hour format**- displays 24 hour format at all times.

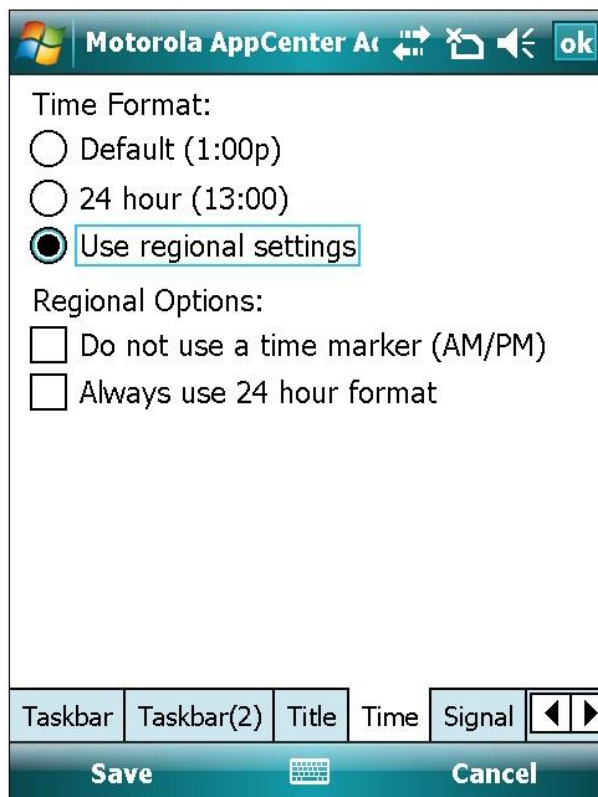

Signal

Note: This setting is used for Motorola devices with 802.11x WLAN radios. The Signal tab enables a specific set of actions to occur if the AppCenter Launch Screen Taskbar Signal (WLAN) icon is tapped. To use these settings, **Show Signal** must be enabled in the Taskbar tab. Depending on the type of driver resident on the device, either Mobile Companion (Spectrum24 WLAN management application) or Fusion radio utilities are accessible.


- **Adapter Name-** contains the resident 802.11x radio. This entry is automatically populated.
- **Do nothing-** disables all the Signal tab selections.
- **Display Mobile Companion status-** accesses the Mobile Companion status dialog.
- **Display Mobile Companion menu-** accesses the Mobile Companion menu.
- **Display Fusion status-** accesses the Fusion status dialog.
- **Display Fusion diagnostics-** accesses the Fusion diagnostics application.
- **Display Fusion status or diagnostics-** accesses the menu for Fusion status or diagnostics.
- **Display Fusion menu-** accesses the full Fusion menu.

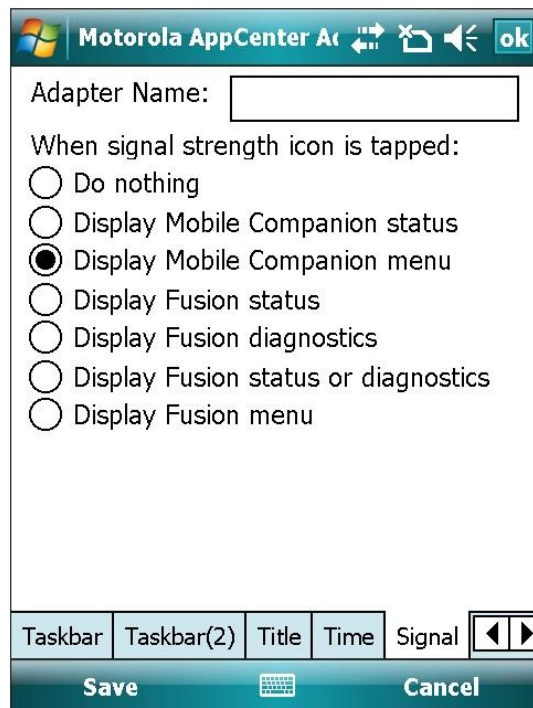

Log

The Log tab enables viewing of the current AppCenter Log File entries. All attempted program launches or hardware keys presses that are not permitted (access violations) are captured in the log file. Viewing the log file for blocked applications helps the administrator define or troubleshoot the current AppCenter configuration (program access).

Tap **Clear Log** to clear the current AppCenter log file.

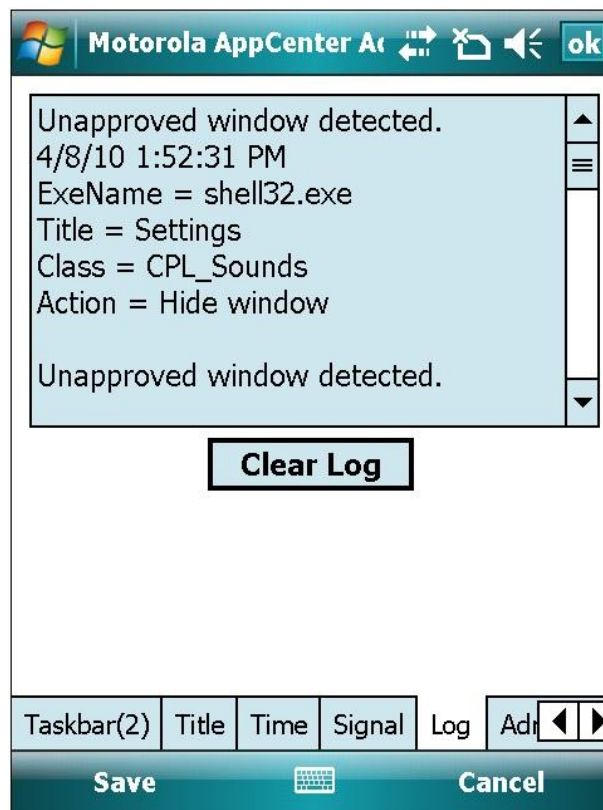


Usage Example

When approving a phone application, press the hardware key designated for send to discover the applications that are used for phone operation (usually Send and End buttons). AppCenter will monitor the phone application starting, but because the application is not approved, it will terminate the application and place the results of the violation in the AppCenter log file. View the log file which will contain the ExeName, windows Title, and Class entries necessary to add and approve the phone application.

Admin

The Admin tab enables changing of the AppCenter current license key and admin password. AppCenter stores the admin password as a salted password digest. The default hash type is MD5 and the salt size is 8. Existing passwords will be converted automatically. Both MD5 and SHA hashes are supported with salt sizes of 0-32.

- **New Password**- enter the new admin password.
- **Confirm Password**- enter the new admin password for confirmation.
- **Login disabled in user mode**- disables **Admin Login** and **Exit** selections in the AppCenter Launch Screen **Tools** menu.

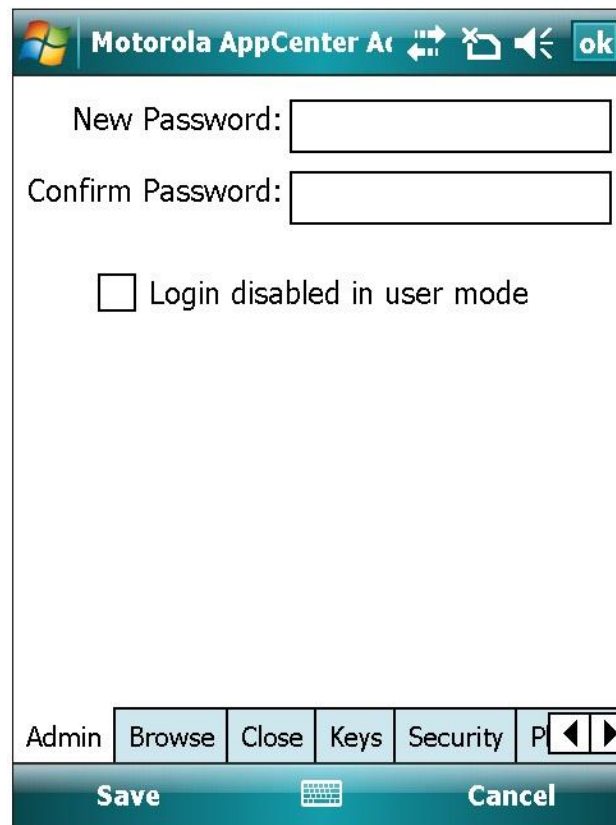

The screenshot shows a dialog box titled "Motorola AppCenter Admin" with a standard Windows Mobile interface. It contains two text input fields labeled "New Password:" and "Confirm Password:". Below these is a checkbox labeled "Login disabled in user mode". At the bottom, there is a navigation bar with buttons for "Admin", "Browse", "Close", "Keys", "Security", and "P" (with left and right arrow icons). A "Save" button is on the left and a "Cancel" button is on the right of the bottom bar.

Admin Login Disabled


If the Admin Login is disabled because the following factors exist, changing the AppCenter configuration of the device cannot be done using AppCenter:

1. The **Login disabled in user mode** setting is enabled (Admin tab).
2. The AppCenter Administration application is not approved and is not visible on the AppCenter Launch Screen.
3. AppCenter starts automatically when the device is booted.

To re-enable the login, use the Athena remote management application or ActiveSync to copy an unmodified version of the user configuration file (AppCenter_User.cfg) and replace the existing configuration file on the device. Reboot the device or restart AppCenter (AppCenter.exe) for the changes to take effect. The Admin Login option will then be available in the AppCenter Launch Screen **Tools** menu for accessing AppCenter Administration Mode.

Example:

AppCenter Launch Screen with Login Disabled

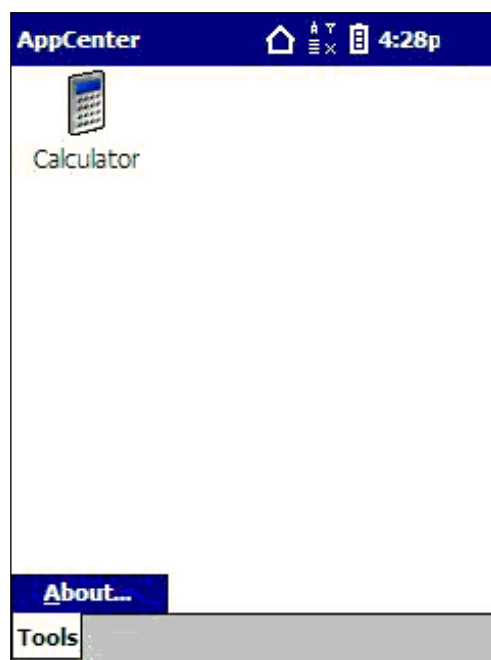


Browse

The Browse tab defines the scope (folders and file extensions) of the program search when using the browse button to access the *Select a program* screen. On the General tab, the browse button appears to the right of the **Description** field when accessing **Tools > New Program**. See [New Program](#) on page 4-7 for more information.



The **Ext** list contains the file extensions that are searched. The extensions are not limited to executable programs and are not case-sensitive. **Note:** Do not add a period (.) as part of the extension.

- **Include all shortcuts**- allows the shortcuts to be visible when browsing. A shortcut must exist in the folders specified in the **Folders** list. Only executables whose file extension is registered in the **Ext** list will be displayed when browsing for programs.
- **Include control panel applets**- locates and adds Control Panel (.cpl) applets to the search. For example, Owner Information or Clocks & Alarms.

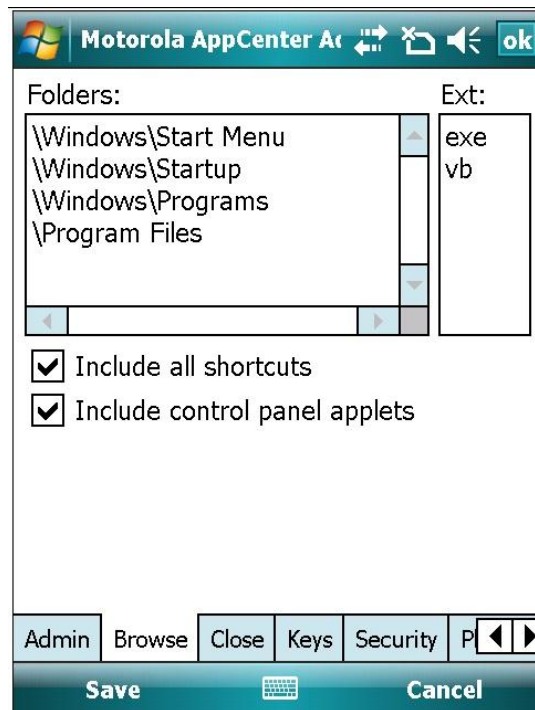


Close

The Close tab enables the administrator to control program executables to always stop (**Always Close**) and/or always start (**Never Close**) when accessed. The executables entered on this screen override any approved program definition in Administration Mode. For example, if an executable is defined as an approved program and is displayed on the Administration Mode Screen but the program executable name is in the **Always Close** list, the executable will be shut down immediately if accessed.

- **Always Close**- contains the executable names that are always stopped when accessed.
- **Never Close**- contains the executable names that are always allowed to run when accessed.

Note: Some application dialogs (open and save) can enable unapproved programs to be launched when accessed. It is recommended to list or review specific entries for these applications when determining the Always Close executable list.

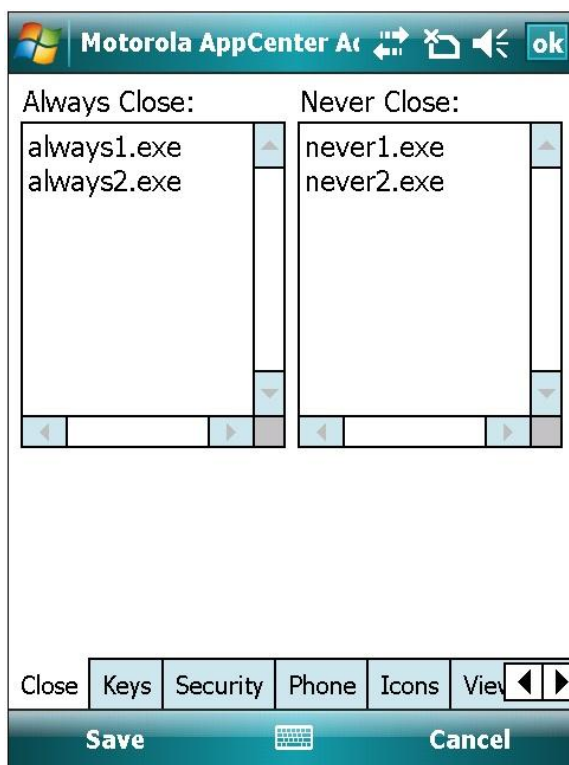


Keys (Phone Devices)

The Keys tab enables the administrator to define the application launch capability of the volume (speaker/headset) and phone hardware device keys. This tab also determines whether the SIP is displayed from the AppCenter Launch Screen.

- **Hide SIP**- disables the use of the on-screen keyboard. **Note:** For Windows Mobile 6.5 devices, the done button is disabled and not actually removed from the task bar.
- **Disable phone key**- (Motorola 9000 devices) disables the use of the phone key. The key is identified by a green icon or dot.
- **Volume keys allowed**- enables the volume keys to function normally.
- **Blocked keys**- allows AppCenter to be configured to block keys that open/access the Windows Start Menu. Tapping a value in the list enables the SIP for manual entry of values. The values are specified in hexadecimal format. For example, the ESC key is *0x1B*.

Multiple keys can be specified and wildcard characters are supported. For example, to not block any keys, remove all Blocked Keys values. To block all keys, replace the values with an asterisk (*).

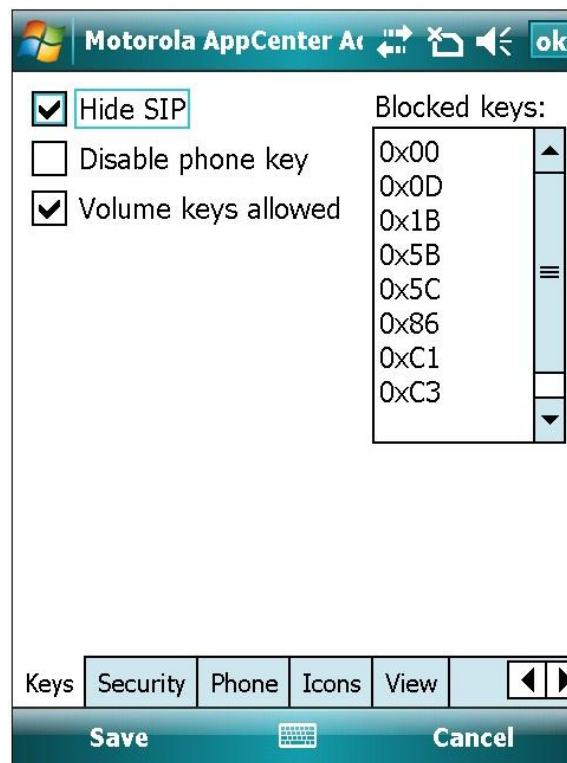

Debugging Blocked Keys Using the Log

AppCenter logs information in the Log file each time a specified key is blocked. To debug a key configuration, use the following procedures. See [Log](#) on page 4-19 for more information.

Approved Keys that are not working in AppCenter:

1. Access Admin Mode.
2. Tap **Options** and then tap the **Log** tab.
3. Tap **Clear Log** to clear the current log information.
4. Log out of Admin Mode.
5. Press the key once.
6. Access Admin Mode.
7. Tap **Options** and then tap the **Log** tab.
8. Locate the KeyCode value in the log.
9. Tap the **Keys** tab.
10. Remove the value from the **Blocked keys** list.


Unapproved keys that are still working in AppCenter:

1. Access Admin Mode.
2. Tap **Options** and then tap the **Log** tab.
3. Tap **Clear Log** to clear the current log information.
4. Block all keys by adding * to the **Blocked keys** list.
5. Tap the **Keys** tab.
6. Log out of Admin Mode.
7. Press the key once.
8. Access Admin Mode.
9. Locate the KeyCode value in the log.
10. Tap the **Keys** tab.
11. Replace the * setting with the KeyCode value.

Security

The Security tab allows the administrator to define access to external files on memory cards (including AutoRun), and other devices.

- **Disable memory card insertion**- (Pocket PC 2003 and above) disables memory card access.
- **Disable IR**- (Pocket PC 2003 and above) disables the reception of IR (Infrared) data from other devices.
- **Disable Bluetooth**- (Pocket PC 2003 and above) disables the Bluetooth radio on devices. **Note:** This setting does not always turn the Bluetooth radio off because of the many different Bluetooth implementations.
- **Disable ActiveSync**- disables ActiveSync connections. If an ActiveSync connection is established when AppCenter starts, AppCenter closes the connection. **Note:** Closing an active connection on Windows Mobile 5 and above devices only works for devices using the RNDISFN1 adapter.

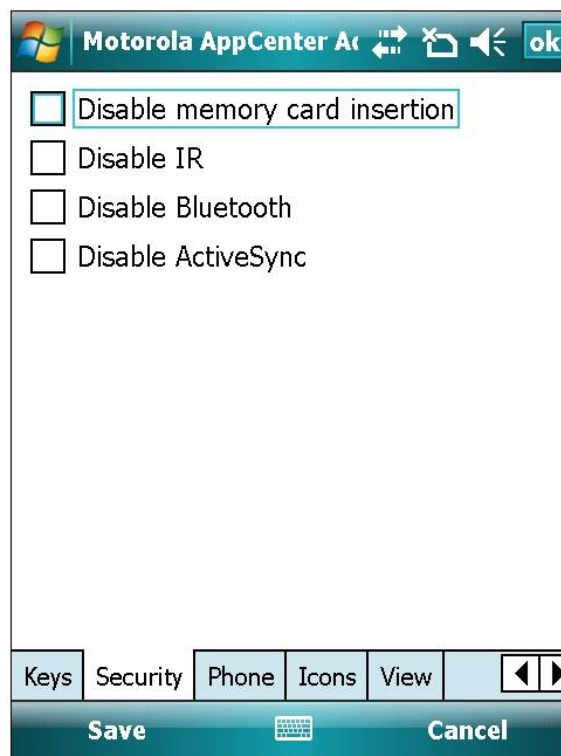

Phone (Windows Mobile 5 and above phone devices)

The Phone tab allows the administrator to control access to the phone features on a phone device.

- **Voice Mail Phone Number-** contains the phone number for voice mail. This phone number is called when the voice mail notification icon is tapped.


The voice mail phone number can be a full phone number or a shortcut number, such as *86. If this setting is left empty, AppCenter will attempt to retrieve the device phone number and call that number. If AppCenter cannot retrieve the device phone number, it accesses the phone application.
- **Add phone menu to WWAN icon-** (devices with RIL installed) enables access to the phone menu by tapping the WWAN icon on the taskbar. The menu contains selections for turning the phone on and off. **Note: Show WWAN** must be enabled globally in **Options > Taskbar**. See [Taskbar](#) on page 4-11 for more information.
- **Show phone icons on taskbar-** enables access to phone notification icons (missed calls, unread text messages, voice mail) and display these icons on the taskbar. After program approval, tapping the missed calls icon accesses the call log which shows only missed calls, text messages icon accesses the text message inbox, and voice mail icon accesses the phone which calls the voice mailbox.

When this setting is enabled, the phone and messaging applications must be approved to support tapping the icons. To do this, add cprog.exe and tmail.exe to the approved executables for System. For the Palm Treo, also add *|DesktopExplorerWindow to the approved windows for Shell32. See [EXEs](#) on page 5-10 for more information.
- **Block incoming calls-** disconnects (hang up) when an incoming phone call is received.

- **Suppress SMS notifications**- disable the SMS native client communication on the device. For example, check this setting to close new text message notifications when an SMS message is received.
- **Show today screen in 10 seconds**- (Windows Mobile 6.x phone devices) brings the Windows Today screen to the foreground after the specified number of seconds has passed. The left and right arrows  are used to specify the number of seconds. The default is 10 seconds. To disable this setting, set the number of seconds to 0.

The phone application does not create the phone dialog window until the Today screen appears. If AppCenter or an application such as Pocket IE is configured to start with the device, the Today screen may not display and the phone button (green) cannot display the missing phone dialog. Unless the Today screen is approved, AppCenter will send the Today screen to the background.


Note: AppCenter only uses this setting for WM 6.x devices with phones and only when the phone dialogs are missing.

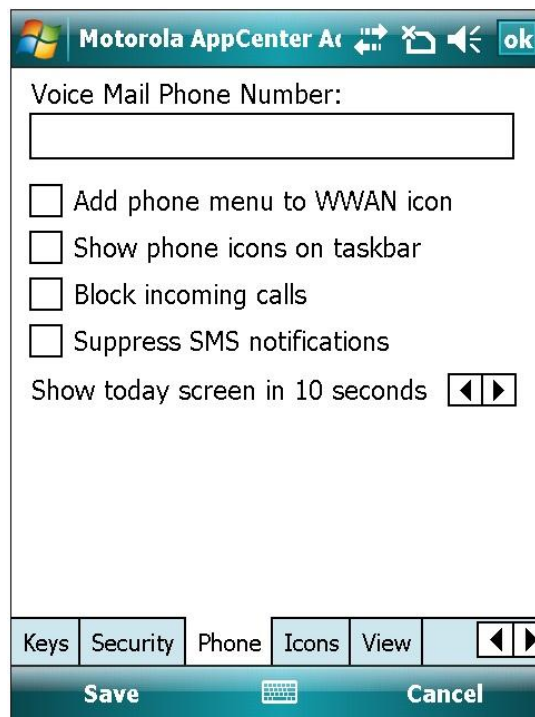

Icons

The Icons tab enables administrators to disable the icons on the AppCenter Launch Screen during an AirBEAM update or for a specific time period.


- **AirBEAM Update Disables Icons**- disables the icons during an update of AirBEAM.
- **Disable Icons for 0 Seconds**- disables the icons for a specific number of seconds. The left and right arrows  are used to enable and select the number of seconds.

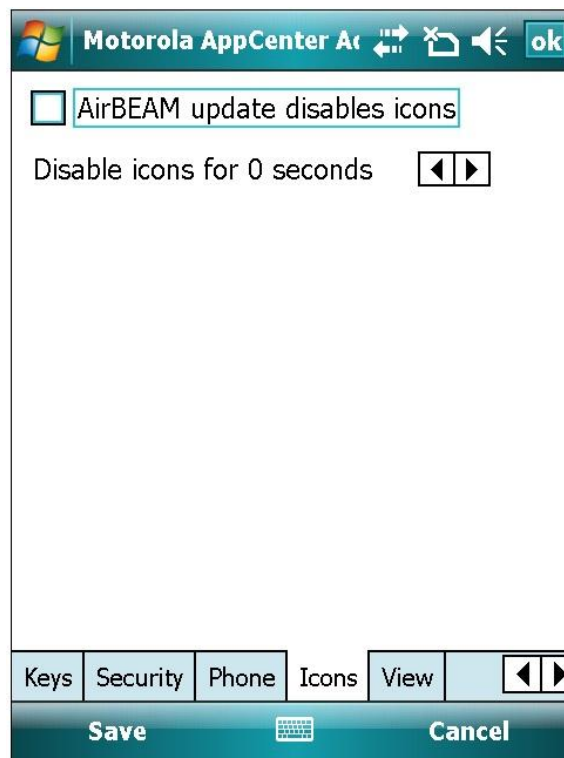

View

The View tab enables an administrator to customize the appearance of approved programs which appear to the user on the AppCenter Launch Screen. Programs will be arranged in columns depending on the length of the descriptions, the font size, and whether the device is in portrait or landscape orientation.

- **Large Icons**- displays the program icons in a large size.
- **Small Icons**- displays the program icons in a small size.
- **List**- displays a list of program names centered on the screen.
- **Text Color**- specifies the color of the icon text. The default is black (0x000000).
- **Background Color**- specifies the color of the screen background. The default is white (0xFFFFFFFF). The background color is always used as the text background color. If a custom background bitmap is not in use, the background color is used for the entire AppCenter background. **Note:** When using custom bitmaps as a background, set Background Color to match the predominant color of the bitmap.
- **Font size/Bold**- specifies the font size and weight.

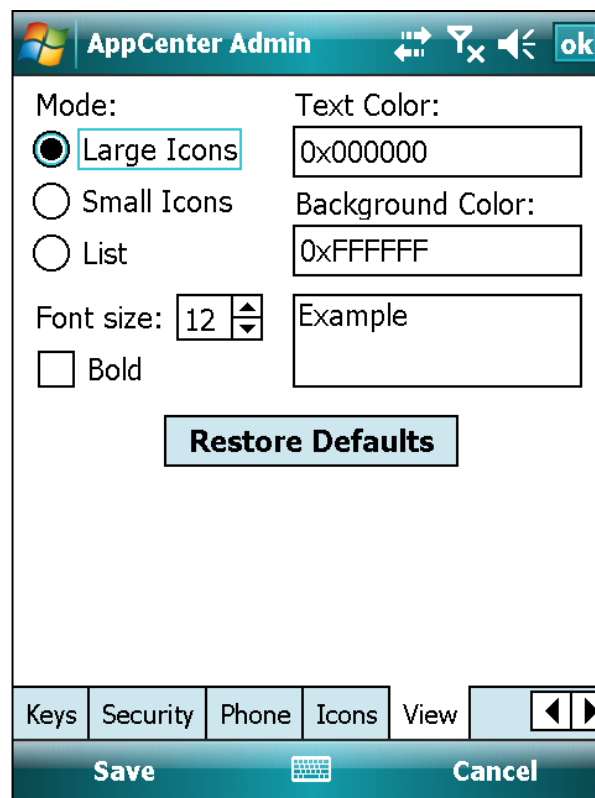


The screenshot shows the 'AppCenter Admin' window with the 'View' tab selected. The window has a title bar with the Windows logo, 'AppCenter Admin', and standard window controls. The main area contains settings for the View tab. On the left, under 'Mode:', there are three radio buttons: 'Large Icons' (selected), 'Small Icons', and 'List'. Below these are 'Font size:' (set to 12) and a 'Bold' checkbox. On the right, under 'Text Color:', there is a text box with '0x000000'. Below that, under 'Background Color:', there is a text box with '0xFFFFFFFF'. An 'Example' text box is also present. A 'Restore Defaults' button is centered below the font settings. At the bottom, there is a tab bar with 'Keys', 'Security', 'Phone', 'Icons', and 'View' (selected). To the right of the 'View' tab are left and right arrow buttons. At the very bottom are 'Save' and 'Cancel' buttons.

AppCenter Admin	
Mode:	Text Color:
☒ Large Icons	0x000000
☐ Small Icons	Background Color:
☐ List	0xFFFFFFFF
Font size: 12	Example
☐ Bold	
Restore Defaults	
Keys	Security
Phone	Icons
View	
Save	Cancel

Example:


Large Icons (Default)

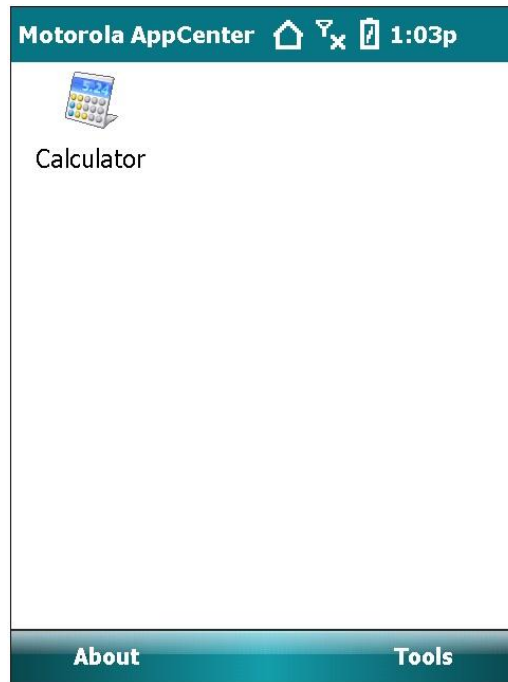

Small Icons



List

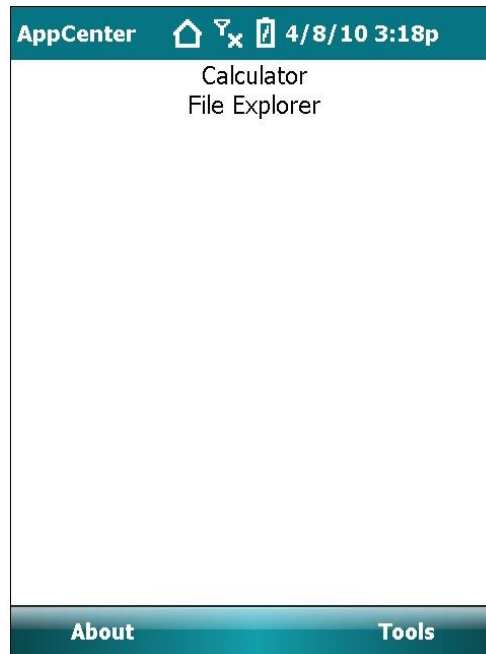

Specifying Colors

Colors can be specified in decimal or hexadecimal format. For example, 255 (decimal) and 0x0000FF (hexadecimal) both specify bright red. Precede the number with *0x* to specify hexadecimal.

In hexadecimal format, the first two digits specify blue, the next two digits specify green and the last two digits specify red. Each two digits specify 256 shades of the color with 0/0x00 being darkest and 255/0xFF being lightest. When all three color settings are equal, varying shades of gray from white to black are specified.

Note: A device may not be able to render all possible colors. If a color is not supported, the closest match is used.

Using Background Graphics

AppCenter enables customization of the Launch Screen using a graphic file as a background. A background or logo bitmap (.BMP), Joint Photographic Experts Group (.JPG), Portable Network Graphics (.PNG), Graphics Interchange Format (.GIF), or Icon Image (.ICO) file can be used. The file naming conventions is AppCenter, AppCenter.jpg, or AppCenter.bmp, etc.

Place the graphic file of the background or logo that you want to use in the folder which contains the AppCenter User Mode executable (AppCenter\Program Files\Odyssey Software\AppCenter\AppCenter.exe).


If colors in the bitmap are not supported on the device, the closest color is used.

For best results, use the **Text Color** and **Background Color** settings on the View tab to coordinate the program descriptions with the bitmap. See [View](#) on page 4-30 for more information.

The bitmap should be large enough to cover the AppCenter Launch Screen. The minimum size should be a width equal to the device display and a height that is 51 pixels less than the height of the device display (102 less on VGA devices).

Example:

For a 240 x 320 display, the minimum bitmap should be 240 x 269. Larger bitmaps can be used but will be clipped.

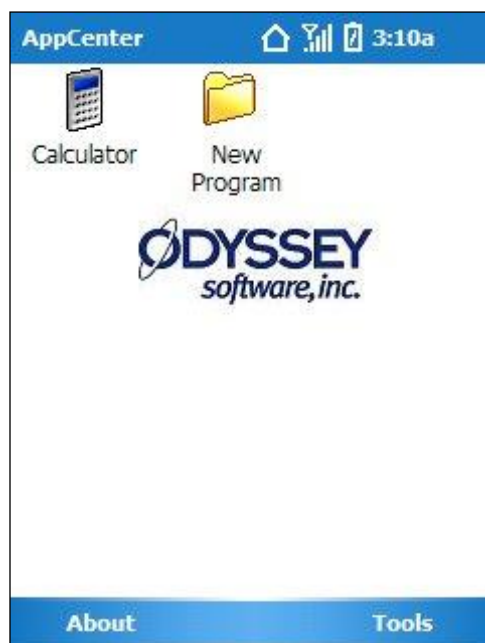

This page intentionally left blank

5 Adding Approved Programs

Overview


This chapter discusses adding programs which display to the user as selectable icons on the AppCenter Launch Screen. Approved programs may also allow other applications to run in background or run application sub-processes.

Generally, there are two sources for a request to add approved programs to AppCenter:

1. User community requirement to have the program to run on demand.
2. Unapproved processes (recorded in the Log file) that AppCenter terminates, but which other programs require to run.

The pre-approved applications and system level functions (Calculator, Shell32, Symbol Radio, System) shown in the following illustration are created upon initial installation of AppCenter and are viewable in Administration Mode. The programs are added automatically to the configuration file.

Note: It is recommended to test program configurations before deploying to cold boot environments as devices could be made inoperable by deleting a critical device process or a forgotten password.

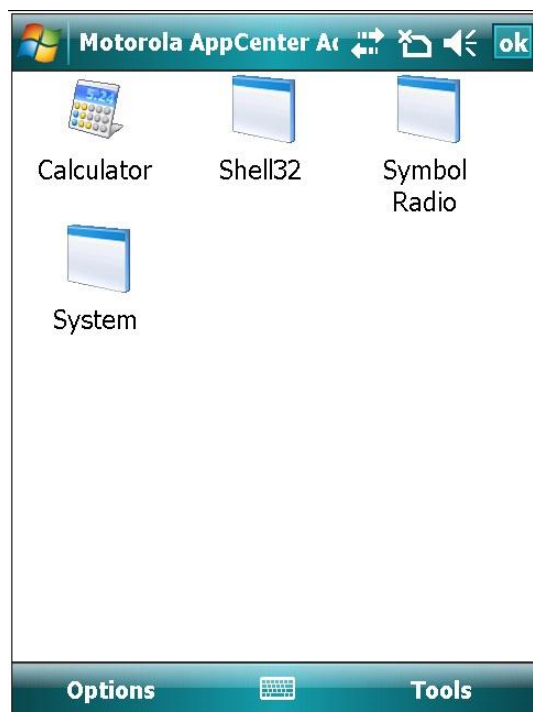

Pre-approved Applications and Functions

System level functions and applications are pre-approved executables that the Windows Mobile operating system requires for operation.

Pre-Approved System Level Functions

The following table contains approved system level function.

Warning: Some functions may be deleted, but use caution as device functionality may be impacted.

ActiveSync	Defines approval for ActiveSync auto-connect when a PC makes an ActiveSync connection.	CAB Files	Defines approval that allows for CAB files to install when opened.
Calculator	Used as an example of a visible program. EXAMPLE ONLY	Connection Manager	Defines approval for dynamic network connections to automatically connect when media is attached.
Dialup Networking	Defines approval for dynamic WWAN network connections to automatically connect when network access is requested by applications.	Fusion	Defines approval for Motorola Fusion radio utilities.
Mobile Companion	Defines approval for Motorola S24 WLAN management application.	Welcome	Defines approval for the Welcome Application launched when Windows Mobile starts from a cold boot, allowing time zone and calibration changes.

Pre-Approved Applications

The following list contains the applications with modifiable attributes that are pre-approved when AppCenter is first run:

- **Calculator** (calc.exe)– used as a User Mode program example.
- **Dialup Networking** (rnaapp.exe)
- **Connection Manager** (connmgr.exe)
- **ActiveSync** (repllog.exe)
- **CAB Files** (wceload.exe)
- **Mobile Companion** (nictt.exe)– for Motorola Spectrum24 radio devices.
- **Fusion** (wclaunch.exe)- for Motorola Fusion radio devices.
- **Welcome** (welcome.exe)
- **services.exe**- system executable and custom services applications.

Pre-Approved Applications Not Closed by AppCenter

The following executable windows or processes will not be closed by AppCenter. The executables can be closed by adding the executable name in the **Always Close** list on the Close dialog. See [Close](#) on page 4-23 for more information.

Warning: Use caution when closing system executables as this may cause the device to crash or become unstable.

cemgrc.exe	conmanclient.exe	connmgr.exe	ctlpnl.exe
device.exe	evmon.exe	filesys.exe	gwes.exe
keymode.exe	nictt.exe	nk.exe	poutlook.exe
rapisrv.exe	remnet.exe	repllog.exe	rnaapp.exe
services.exe	shell32.exe	srvtrust.exe	tmail.exe
toolbox.exe	udp2tcp.exe	wclaunch.exe	welcome.exe

The following pre-approved executables should not be deleted or configured further as basic device functionality can be negatively impacted or the device may be disabled.

- **Device** (device.exe)- defines approval for dynamic plug and play operation.
- **GWES** (gwes.exe)- defines approval for system level windowing functions.
- **Shell32** (shell32.exe)- defines approval for Windows Classes static, worker, dialog used in message boxes, and other built-in alerts.

Adding New Programs Procedure



This procedure creates an approved program that can be accessed by AppCenter users.

1. Tap **New Program** from the **Tools** menu.

OR


Hold the stylus on a program icon until the menu appears, then tap **New**.

Note: The device arrow and enter keys can also be used to select and access the program.

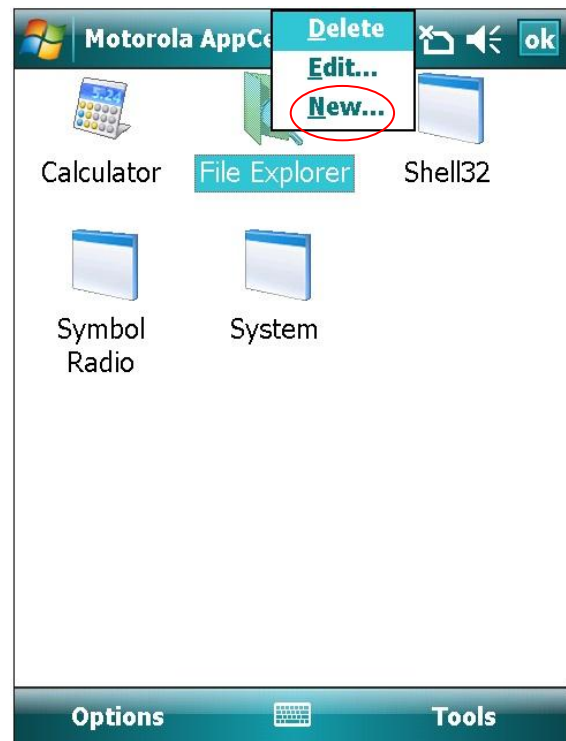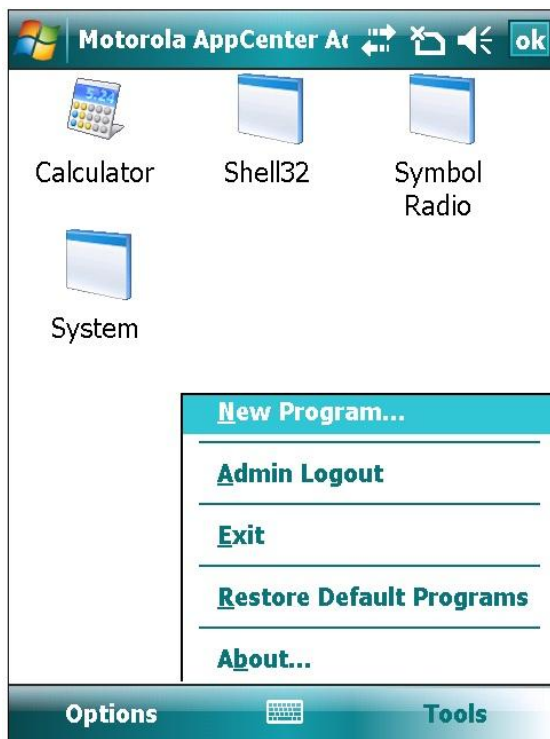

The General tab displays for configuring the program attributes of the new program. The program settings are accessed by tapping the tabs at the bottom of the screen. The settings on the tabs only pertain to this program. The left and right arrows are used to scroll the tabs.

2. If the program is installed on the device and its location is defined in the paths specified using **Options > Browse**, tap the browse button  and continue to the next step.
3. If the program is not installed on the device or to configure the program manually, skip to step 5.

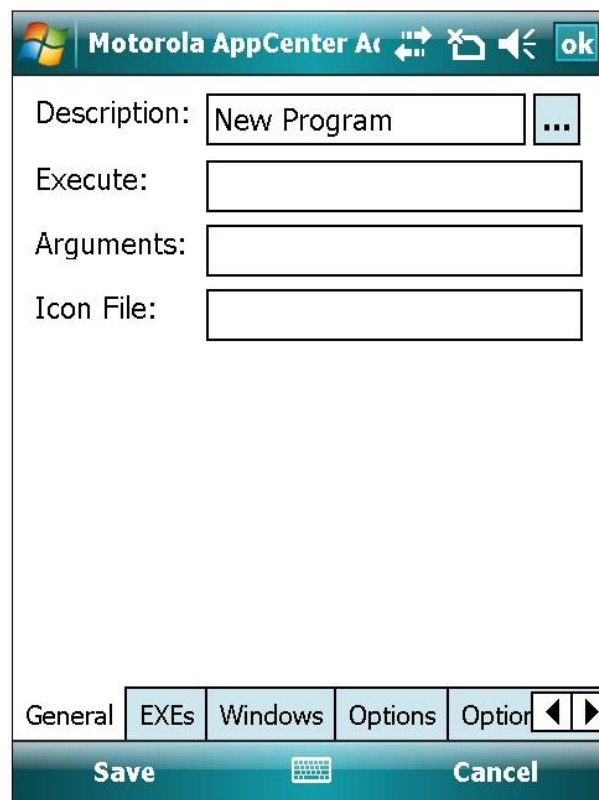

Motorola AppCenter Administrator

Description: New Program ...

Execute:


Arguments:

Icon File:

General EXEs Windows Options Options ◀ ▶

Save Cancel

4. The browse button accesses the *Select a program* screen which shows the available programs for approval. Tap a program to automatically populate the entries in the General and Exes tabs based upon the program attributes defined in the registry and other system resources. See [Browse](#) on page 4-22 for more information on configuring the program search criteria.

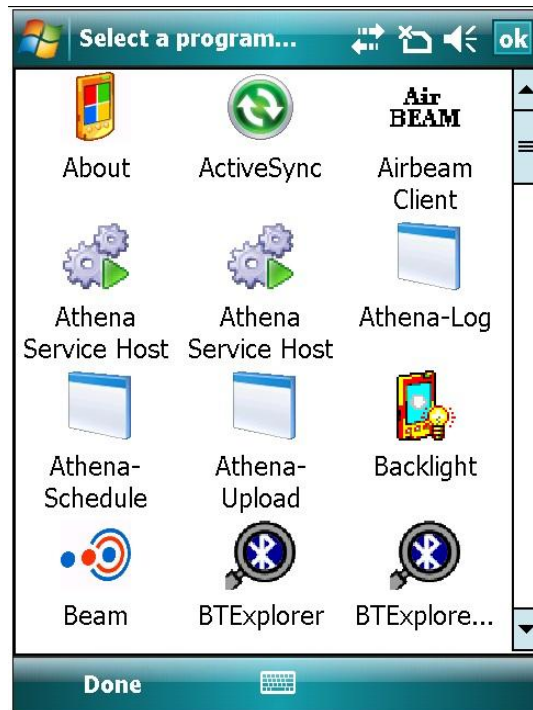


5. Manually, configure the program attributes in each tab. See [Defining New Program Attributes](#) on page 5-9 for information about the attributes located on the New Program screen tabs.
6. When finished, tap **Save**. The program is now approved and viewable in the AppCenter Launch Screen.

Editing and Deleting Approved Programs

Existing approved programs can be modified or removed from AppCenter.

Edit Program

An approved program can be modified by holding the stylus on the desired program until the options menu appears. Tap **Edit** to access the program attributes.

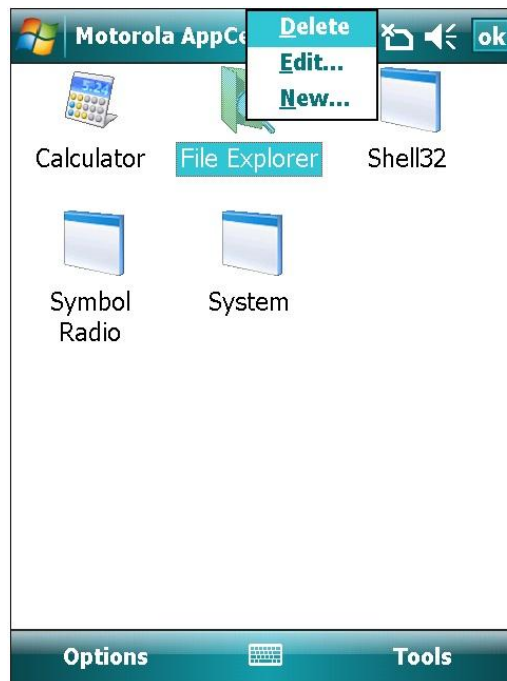

Delete Program

An approved program can be deleted by holding the stylus on the desired program until the options menu appears. Tap **Delete**, and then when prompted, tap **Yes** to confirm the deletion.




Defining New Program Attributes

This section discusses the entries that are used to configure programs for use in AppCenter.

General

The General tab contains the following entries:

- **Description**- specifies the icon program/title on the AppCenter Launch Screen.
- **Execute**- specifies the full path and file name of the process that is launched for the program. See [EXEs](#) on page 5-10 for more information.
- **Arguments**- allows the specification of any command line arguments required for running the program.
- **Icon File**- specifies the full path and file name of the executable whose icon will be used as the icon on the AppCenter Launch Screen. Typically, this entry contains the same file name as the **Execute** entry.
- **Save**- save all the information on all tabs.
- **Cancel**- cancel all modified entries since the last Save was performed.

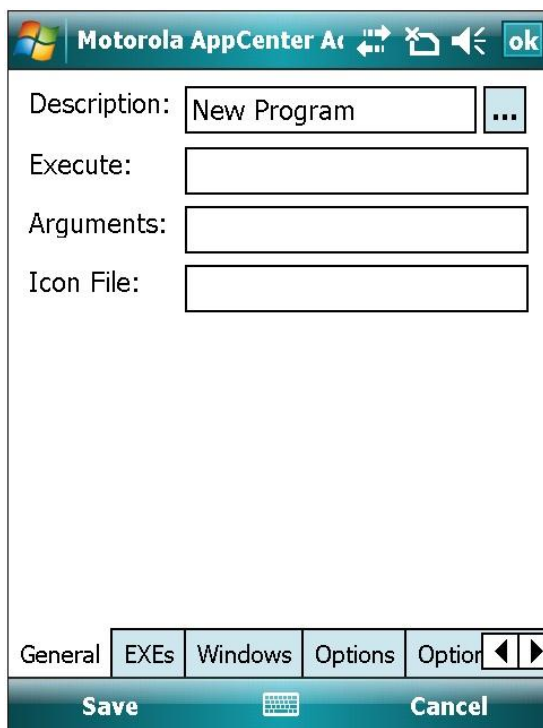


EXEs

The EXEs tab allows the manual entry of a specific executable (.exe files) to use when launching a process that is identified in the **Execute** entry on the General tab. **Approved EXE Names** specifies an executable file if **Execute** contains the full path and file name to a non-executable file.


More than one executable can be specified for approved programs. Normally, one executable is specified per approved program. If there are multiple approved programs which are identical except for the executable, these approved programs can be consolidated into one entry.

For example, system programs such as device.exe and gwes.exe (required to set a device password and enable the password dialog in AppCenter) that are not used for launching a program but are only used for approving system windows. Another example is an approved program that launches additional programs.

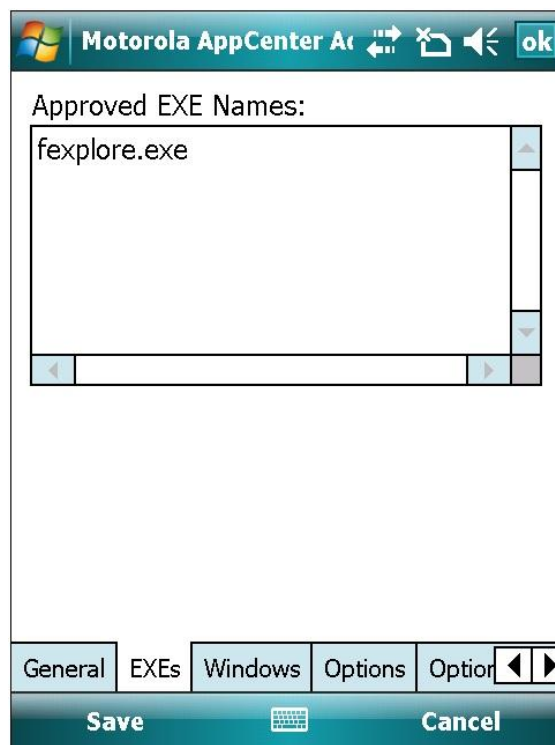

Example:

A Pocket Word document named *Letter1*. **Execute** on the General tab contains `\My Documents\Letter1.psw` which is a path to non-executable file. **Approved EXE Names** would contain `pword.exe` which is the associated Pocket Word program executable.

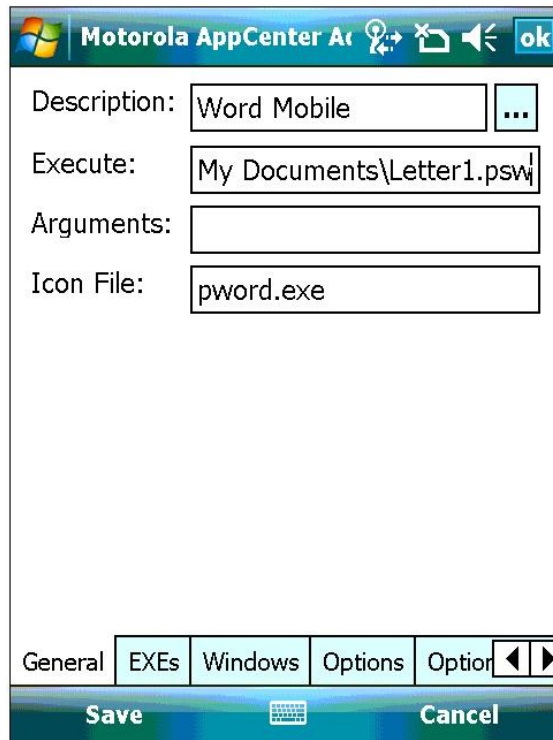

Windows

The Windows tab restricts the approved program to only display windows whose Title and Class attributes match the specification in the **Approved Window Titles** list. The default entry ***|*** is used for most approved programs (specified in the EXEs tab) as the only approved window. Approved windows apply only to the approved program to which they are associated.

The format for an entry is **{WindowTitle}|{WindowClass}**.

The following characters can be used in an approved window string:

- **|** - divides Title from Class.
- ***** - wildcard. Match up to the first occurrence of *. Characters after * are ignored.
- **?** - match for one character position.
- **** - match the next character exactly. For example, if a window title contains a backslash enter **** or enter **|** if the title contains a **|** character.

The following formats are supported for approved windows:

Format	Definition
Title or Title or Title *	Match title. Any class allowed.
Title Class	Match title and match class.
Class	Match blank title and match class.
	Match blank title and any class.
* Class	Any title allowed. Match class.
abc* xyz*	Match any title starting with <i>abc</i> and match any class starting with <i>xyz</i> .



Identify Window Title and Class

To identify the program windows Title and/or Class, perform the following:

1. Remove the default entry ***|***.
2. Save the configuration and run the program from the AppCenter Launch Screen. The program should not display many (if any) windows.
3. Re-enter AppCenter Administration and examine the log file using **Options > Log**. The unapproved window Title and Class will be listed and can then be added to the list.

Note: Adding ***|*** as an approved window for Shell32.exe will allow all settings applets to be used. Generally, only approve windows for settings the user is allowed to change.

Guidelines to Consider When Approving Programs

The following guidelines should be applied when approving programs:


1. An ExeName entry for a specific EXE should appear only once in the configuration file.
2. ***|*** should be the only Approved Window setting for an approved program.
3. **Note:** In most cases, guidelines 1 and 2 should always apply. An exception is when approving control panel applets that use the same EXE to launch different applets. For example, to approve only the Backlight and Power applets. The same **ExeName** setting for both will be used and the Approved Window settings that applies only to these applets will be specified. Another exception to guideline number 2 is when a user requires access to a subset of screens in a program.
4. If you have defined ***|*** as an Approved Window for a program, do not add any additional Approved Window settings.
5. If all windows for a program need to be approved and it is not required for the user to launch the program, add an **ExeName** setting to the *system* approved program rather than creating a new approved program. In general, when **HideFromUser** is set to True, a separate approved program for that EXE is not required. The exception would be when not approving all windows for the EXE.
6. If a window is included in the AppCenter log, it does not mean that it must be approved. For example, on Windows Mobile 6 devices, the Desktop Explorer Window will appear in the log each time AppCenter is started. This window should not be approved.

Options

The Options tab specifies how to display the AppCenter Launch Screen icons for the program and how the program will interact. When an item is selected or checked, the setting is enabled for the program.

- **Hide from user**- prevents the program from appearing in AppCenter (AppCenter Launch Screen).
- **Hide SIP**- disables the on screen keyboard.
- **Hide menu bar**- prevents the program's command bar from appearing while the program is active.
- **Read-only**- disables modification of the approved program when using Administration Mode.
- **Hide start menu**- hides the Windows Start Menu and done button. This setting also disables Time/Next Appointment icons while the program is active. The default setting is checked (enabled).
Note: The Start Menu is hidden for all programs if the global setting **Options > Taskbar > Hide Start Menu** is set. See [Taskbar](#) on page 4-11 for more information.
- **Hide done button (X)**- hides the done button when **Hide start menu** is selected.
- **Always launch program**- allows a program to launch each time it is accessed, overriding AppCenter default program behavior. Use this setting when multiple launches are desired or a program prevents multiple launches internally. By default, AppCenter launches a program the first time it is tapped and caches the program's window handle. On subsequent taps, the cached window is brought to the foreground. This prevents multiple launches of the same program.
Note: For Athena.exe, **Always Launch Program** should be selected.

- **Disable relaunch for 0 seconds**- disables an icon for a specified time period as the program is accessed to prevent multiple launches of the same program. This setting can be used for applications that take a long time to initialize and start. For example, .NET Compact Framework. The left and right arrows  are used to enable and scroll the number of seconds.

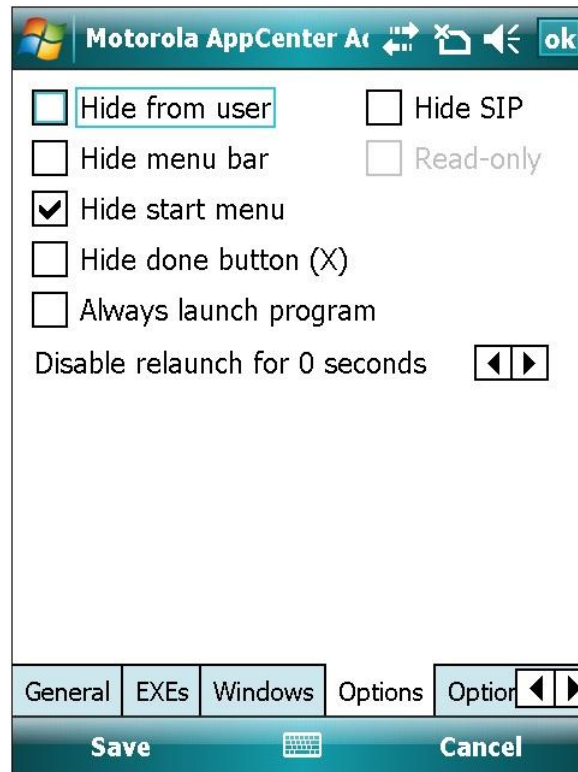

Examples:


Start Menu Visible



Start Menu Hidden



Done Button (X) Visible

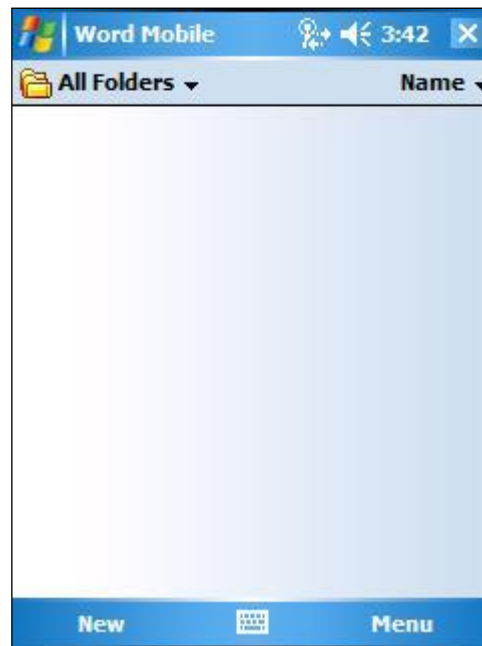


Done Button (X) Hidden



Menu Bar Visible




Menu Bar Hidden

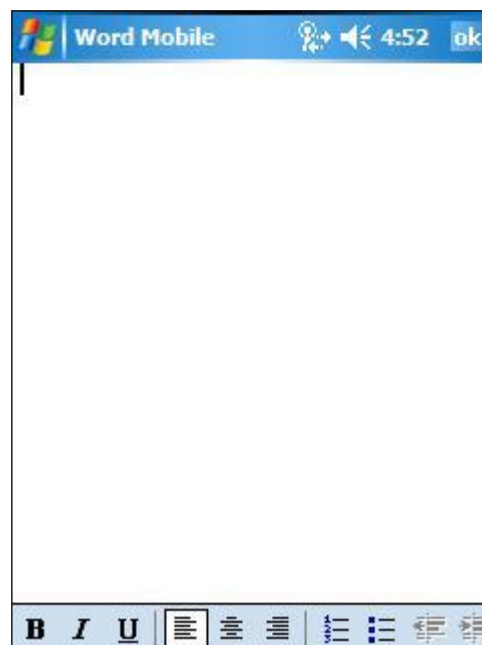

Options(2)

The Options(2) tab specifies whether to display the program in the Tools menu, enable the volume keys, and display the taskbar icons when the program is running. When an item is selected or checked, the setting is enabled for the program.

- **Add to tools menu**- places the program description on the AppCenter Tools menu. Tapping the program name launches the program from the Tools menu. If **Hide From User** is set, the program appears only on the Tools menu, otherwise, the program also appears as an icon on the AppCenter Launch Screen.
- **Volume keys allowed**- enables the volume hardware keys when using the program. The default setting is checked (enabled).
- **Show standard taskbar icons**- displays taskbar icons when the program is running. The taskbar icons contain links to other approved programs. **Note:** It is recommended that this setting also be enabled for Shell32.exe. Otherwise, when a taskbar icon is tapped and a notification dialog appears, the taskbar returns to the AppCenter taskbar. See [Taskbar](#) on page 4-11 for more information on the display and behavior of the taskbar.

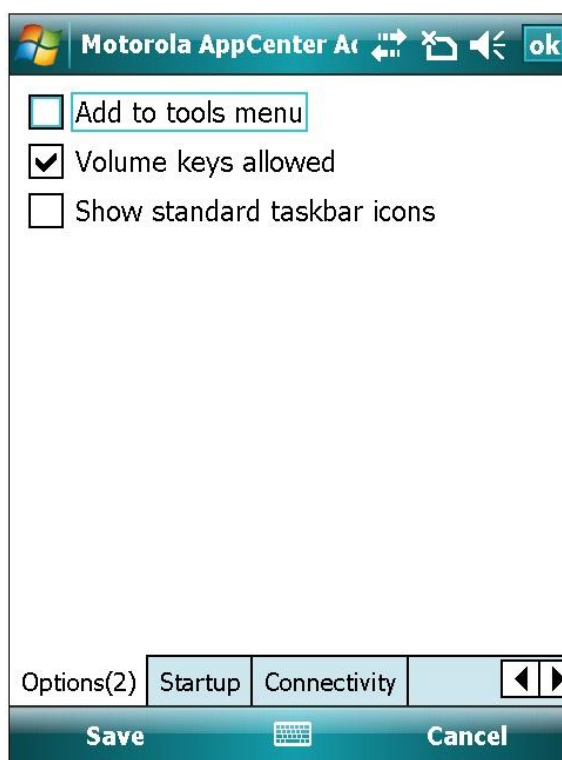


Startup

The Startup tab specifies how the program automatically starts and/or stops when AppCenter opens or closes.

- **Start when Appcenter starts**- launches the program when AppCenter starts.
- **Stop when Appcenter stops**- closes the program when AppCenter exits or is terminated.
- **Delay start for 0 seconds**- specifies a delay before the program is launched. This setting is enabled when **Start when Appcenter starts** is selected. For example, to aid in sequencing the launch of multiple programs by AppCenter. The left and right arrows  are used to enable and select the number of seconds. The maximum startup delay is 120 seconds.

Note: If no setting is specified, the program can be started if it is not hidden.

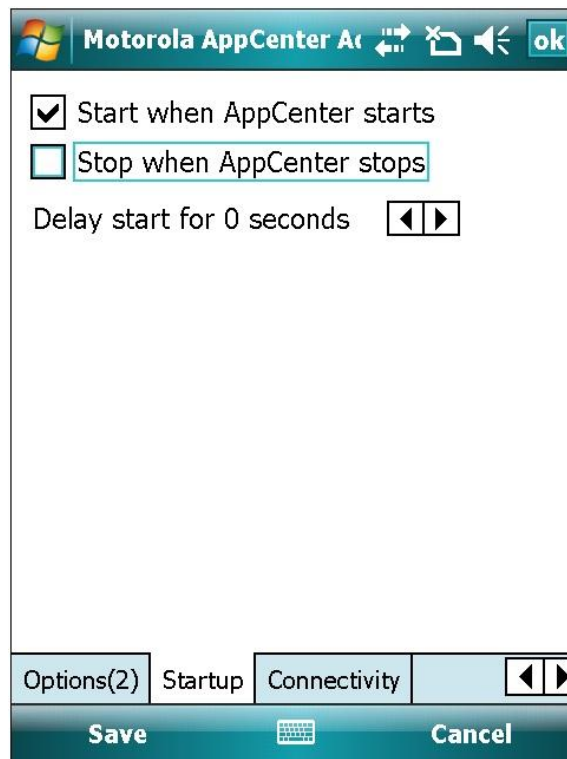


Connectivity

The Connectivity tab enables the program for required device IP addresses or access points. When both **Required IP** and **Required SSID** are used, both requirements must be met for the program to be enabled. The default setting is nothing selected (blank).

- **Required IP**– selects device specific IP address(es). A specified IP address must match an IP address currently available on the device.
- **Required SSID**– selects a specific access point to which devices are associated. A specified SSID must match the current SSID on the device.

The wildcard characters * and ? can be used when specifying the IP and SSID entries:

- * matches any sequence of characters.
- ? matches any one character.

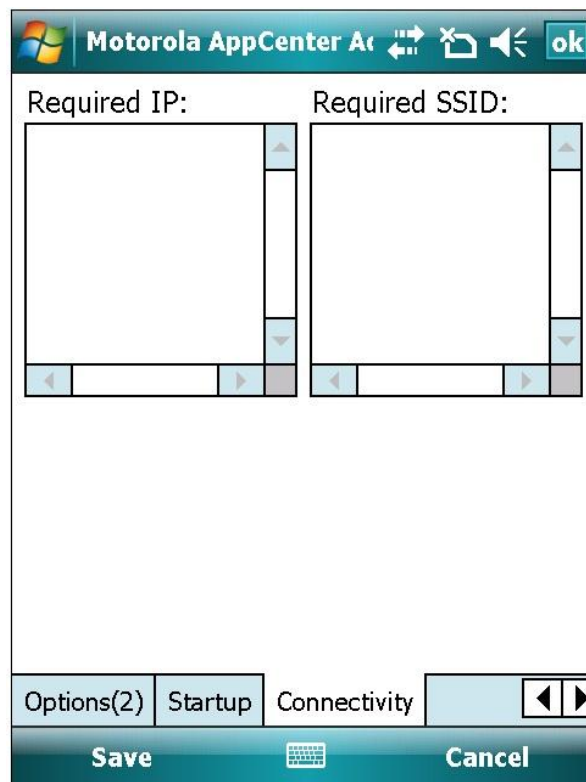

This page intentionally left blank

Appendix A Configuration Files

The Configuration file definitions and format in the appendices is provided for informational purposes only. Configuration files are automatically edited by the Administration Mode application (**AppCenterAdmin.exe**).

Note: Manual editing of the configuration files is not recommended.

AppCenter Configuration (AppCenter.cfg)

The AppCenter configuration file contains the license and administrative password settings. The license setting is required for AppCenter to run and is built into the Motorola OEM version of AppCenter.

If a password setting is not supplied, AppCenter will create the password setting with the default value of *symbol*. When AppCenter is launched it will automatically encrypt the password and save it to the configuration file.

AppCenter User Configuration (AppCenter-User.cfg)

The AppCenter-User configuration file contains configuration options for approved programs, general appearance, and functions of the AppCenter application. The file is auto-created if it does not exist when AppCenter is initially run. All Administration actions performed using AppCenter Administration are captured and saved to this file.

System Options

The system options settings are used on a global basis for the current AppCenter session. These options are arranged in the configuration file in the Taskbar, Title, Time, Signal, Admin, Browse, Close, Key, Security, Phone, Icon, and View Options sections, which correspond to the Administration Mode Options tabs. See [Appendix B Sample Configuration](#) for a sample file layout.

Taskbar Options

See [Taskbar](#) on page 4-11 for more information.

HideStartMenu– disables the Windows Start Menu and enables other AppCenter taskbar options. The default value is True (enabled).

ShowHome– controls the display of the Home icon on the AppCenter taskbar. The Home icon is used to return to the main AppCenter Launch Screen. The default value is True (enabled).

ShowBatteryLevel– enables an icon on the AppCenter taskbar that will indicate the current battery strength. The default value is True (enabled).

ShowVolume– enables the volume icon and volume slider control in the AppCenter taskbar. The default value is False (disabled).

BatteryPercentFormat– changes the battery display (indicates the remaining battery charge) from an icon to a percentage. The default is False (disabled).

ShowAirBeam– enables an icon in the AppCenter taskbar that will indicate whether AirBEAM Safe is connected, roaming, or disabled. The default value is True (enabled).

ShowSignalStrength– enables an icon on the AppCenter taskbar which indicates the wireless LAN network signal strength. The default value is True (enabled).

ShowConnectivity– (Windows Mobile 5 and above) controls whether a network connectivity icon is displayed on the taskbar. The icon indicates whether or not there is any connection available. All connection types are supported, including ActiveSync, Ethernet cradle, WLAN, WWAN and Bluetooth. The default is False (disabled).

ShowWwanSignalStrength– controls the display of the WWAN signal strength in the taskbar on devices that support the Radio Interface Layer (RIL.DLL). See [Signal Options](#) in Appendix A Configuration Files for more information.

ShowTime– displays the current time on the AppCenter taskbar. The default value is True (enabled).

ShowDate– displays the date on the taskbar. **ShowDate** can be used in conjunction with **ShowTime** to display only the date, only the time, both or none. The date is displayed in the short format as specified in the device Regional settings. The default value is False (disabled).

ShowStandardIcons– controls taskbar functionality and is used in conjunction with the **HideStartMenu** setting. The default value is False (disabled).

TaskbarTextColor– controls the color of the text and icons on the taskbar. The default value is 0 which calculates the color based on the Windows CE version.

TaskbarBackgroundColor– controls the color of the taskbar background. The default value is 0 which calculates the color based on the Windows CE version.

Title Options

See [Title](#) on page 4-16 for more information.

AlternateTitle– contains a custom alternate AppCenter title for display in the taskbar. The default is an empty string which enables the default *Motorola AppCenter* title.

DisplayIpAddress– enables the current IP address of the device as the taskbar title. **DisplayIpAddress** defaults to False (disabled). If a device does not have an IP address, the alternate or default AppCenter title is displayed.

DisplayMacAddress– enables the current MAC address of the device as the taskbar title. **DisplayMacAddress** defaults to False (disabled). If a device does not have a MAC address, the custom alternate or default AppCenter title is displayed. If both **DisplayMacAddress** and **DisplayIpAddress** are set to True (enabled), the MAC address is displayed.

TitleBold– specifies the font weight of the taskbar title. The default value is selected (enabled).

TitleFontSize– specifies the font size of the taskbar title. The default value is 11.

AlwaysUseAppCenterTitle– uses the currently configured AppCenter title as the taskbar title rather than the title of the program in the foreground. The default is False (disabled).

Time Options

24HourTimeFormat – controls the time display between 12 hour format (11:59p) and 24 hour format (23:59). The default is False (disabled).

RegionalTimeFormat– enables the current regional time settings for the time display in the taskbar. The default is False (disabled). When **RegionalTimeFormat** is set to True, the **24HourTimeFormat** setting is ignored.

RegionalTimeOptions– enables regional options when the regional time display is specified. This setting is ignored unless **RegionalTimeFormat** is set to True (enabled). The default setting is 2, which removes seconds from the time display. The default setting is always enforced regardless of what other options are set. If an invalid option number is specified, all options are ignored. The following settings are supported:

- **1**- only display the hour. Do not display minutes or seconds.
- **2**- (default) only display the hour and minutes. Do not display seconds.
- **4**- do not display AM or PM or international equivalents.
- **8**- always use 24 hour format.

Signal Options

See [Signal](#) on page 4-18 for more information.

AdapterName– controls which adapter is used to retrieve the IP or MAC address. This setting is used in conjunction with **DisplayIpAddress** and **DisplayMacAddress**. Partial matches are supported. For example, an AdapterName of NETWLAN1 would match an adapter named NETWLAN1 or CTIP\NETWLAN1. If no match is found for **AdapterName**, the default or alternate AppCenter title is displayed regardless of the **DisplayIpAddress** and **DisplayMacAddress** settings. **Note:** AppCenter attempts to automatically set this value to the device 802.11b radio if **AdapterName** is not provided.

FusionMode– controls access to the Motorola Fusion radio utilities. The first time AppCenter is run, this setting is created with the default value of 0 (no action). If this setting is greater than 0, it will override the **MobileCompanionMode** setting. The following values are supported:

- **0**- no action is taken.
- **1**- run the Fusion status application.
- **2**- run the Fusion diagnostics application.
- **3**- show a menu for status or diagnostics.
- **4**- show the Fusion menu.

MobileCompanionMode– controls access to the Spectrum24 WLAN management application when the signal strength icon is tapped. The first time AppCenter is run, this setting is created with the default value of 2 (display menu). The following values are supported:

- **0**- take no action.
- **1**- launch Mobile Companion Status dialog.
- **2**- (default) display the Mobile Companion menu.

Admin Options

See [Admin](#) on page 4-20 for more information.

AdminLoginDisabled– controls the appearance of the Admin Login entry in the User Mode Tools menu. The default is 0 (enabled). If set to 1, the login is disabled and is not visible in the Tools menu.

Browse Options

See [Browse](#) on page 4-22 and [Appendix B Sample Configuration](#) for more information.

BrowseAllShortcuts– displays all shortcuts in the list of programs that can be approved on the *Select a program* screen. The setting defaults to True (enabled). If set to False, only shortcuts whose target file extension is in the **BrowseExtension** setting will be visible. By default, all shortcuts defined in the **BrowseFolder** setting are listed.

BrowseFolder– overrides the default folders that are searched when browsing for a program to approve on the *Select a program* screen. All subfolders of the specified folders are also included in the search. The following list contains the default folders:

\Windows\Start Menu
\Windows\Startup
\Windows\Programs
\Program Files

BrowseExtension– specifies the default file extensions searched when browsing for an approved program on the *Select a program* screen. The extensions used are not limited to executable programs and are not case sensitive. For example, document file extensions (doc) can also be used. **Note:** Periods are not used as part of the file extension. Normally, shortcuts are always browsed regardless of the target file extension. The shortcut browse behavior is controlled by the **BrowseAllShortcuts** setting. The default extensions are exe and vb.

BrowseControlPanel– includes control panel applets when browsing for an approved program on the *Select a program* screen. The default is True (enabled).

Close Options

See [Close](#) on page 4-23 for more information.

NeverCloseExe/AlwaysCloseExe– attempts to send all unapproved windows to the bottom of the Windows z-order, then, determines the executable name of the window owner. If the executable name is not on the internal list of Windows system processes, AppCenter attempts to close the window. In most cases, the application is shut down.

AppCenter never attempts to close a window that belongs to an executable listed under the **NeverCloseExe** setting. These windows are sent to the bottom of the z-order. AppCenter always attempts to close windows that belong to an executable listed under the **AlwaysCloseExe** setting.

Example:

```
AlwaysCloseExe always1.exe  
AlwaysCloseExe always2.exe  
NeverCloseExe never1.exe  
NeverCloseExe never2.exe
```

Key Options

See [Keys \(Phone Devices\)](#) on page 4-24 for more information.

BlockTaskbarKey– blocks the keys that access the Windows Start Menu. On different devices, different keys access the Start Menu. This means that not all listed default settings are needed on every device and could interfere with desired behavior. The values are specified in 2 digit hexadecimal format. For example, the ESC key is 0x1B. **Note:** This setting only affects keys received by the taskbar.

VolumeKeysAllowed– enables the volume hardware keys. The default is True (enabled).

DisablePhoneKey– (Motorola 9000 devices) disables the phone key on Motorola 9000 devices. The phone key (identified by a green icon or dot) launches the phone application. The default is False (disabled).

HideSip– controls the display of the SIP in AppCenter User Mode. The first time AppCenter is run, this setting is created with the default value. The default is True (enabled). In Windows Mobile 6.5, the SIP is disabled and not actually removed from the menu bar.

Security Options

See [Security](#) on page 4-26 for more information.

DisableMemoryCardInsert– (PocketPC 2003 and above) prevents memory cards from being mounted in the file system. This also prevents any auto-run programs on memory cards from running. The setting defaults to False (disabled).

DisableIR– (PocketPC 2003 and above) disables the **Beams > Receive all incoming beams** setting in the Control Panel. This renders a device incapable of automatically receiving IR data from another device. The setting defaults to False (disabled).

DisableBluetooth– (PocketPC 2003 and above) disables the Bluetooth radio on devices that have a Microsoft-implemented Bluetooth stack (StoneStreetOne). The setting defaults to False (disabled).

DisableActiveSync– prevents a device from connecting via ActiveSync. If an ActiveSync connection is established when AppCenter starts, AppCenter will close the connection. For Windows Mobile 5 and above devices, the setting works only on devices using the RNDISFN1 adapter. The setting defaults to False (disabled).

Phone Options

See [Phone](#) (Windows Mobile 5 and above phone devices) on page 4-27 for more information.

AddWwanPhoneMenu– (RIL devices) controls whether a menu appears when the WWAN signal strength icon is tapped. The default is False (disabled). The **ShowWwanSignalStrength** setting must be enabled for this setting to be used.

BlockIncomingCalls– (Windows Mobile 5 and above only) controls the action taken when a phone call is received by the device. The default for this setting is False (disabled). When set to True, AppCenter will disconnect the phone whenever an incoming call is detected.

ShowPhoneIcons – (Windows Mobile 5 and above only) controls the appearance of icons for missed calls, unread text messages, and voice mail. The icons provide access to associated applications. The default for this setting is False (disabled). See [EXEs](#) on page 5-10, [Windows](#) on page 5-11 and [Phone](#) (Windows Mobile 5 and above phone devices) on page 4-27 for more information.

VoiceMailPhoneNumber– (Windows Mobile 5 and above only) contains the number to dial when the voice mail notification icon is tapped. The default is an empty string.

SuppressSmsNotifications– controls the automatic closing of the New Text Message notification when an SMS message is received. The default is False (disabled).

TodayScreenInterval- specifies the number of seconds to wait before bringing the Windows Today screen to the foreground. The default is 10 seconds (enabled). When the entry is 0, the setting is disabled.

Icon Options

See [Icons](#) on page 4-29 for more information.

IconsDisabledCount– disables all icons for a specified number of seconds when AppCenter initially starts. The default is 0 seconds.

AirBeamLock– disables all approved program icons when an AirBEAM update is in process. The default is False (disabled).

View Options

See [View](#) on page 4-30 for more information.

ViewMode– controls the display of the list of approved programs. Programs will be in one or more columns depending on the length of the descriptions, the font size used, and whether the device is in portrait or landscape orientation. The following settings are available:

- **LargeIcons mode**- default.
- **SmallIcons mode**- displays smaller icons to the left of the program descriptions.
- **List mode**- displays a single list of program descriptions centered on the screen. No icons are used.

ViewTextColor, ViewBackgroundColor– controls the colors to use for the display of the AppCenter Launch Screen. The following settings are supported:

- **ViewTextColor**- defaults to 0x000000 (Black). Controls the color of the text used to display the program descriptions.
- **ViewBackgroundColor**- defaults to 0xFFFFFFFF (White). If no custom background bitmap is being used, the background color is used for the entire AppCenter background.

ViewFontSize, ViewFontBold – controls the appearance of the font used for program descriptions on the AppCenter Launch Screen. **ViewFontSize** defaults to 12 and **ViewFontBold** defaults to False (disabled).

Program Options

The following settings are used for selected programs. See [General](#) on page 5-9 for more information.

Approved Programs

Each setting must be preceded by a program statement and the program name.

Execute– full path name of the program, document or shortcut to launch.

Arguments– command line arguments required for running the program.

ExeName– name of the process (executable name) that is launched. This setting contains the name of the executable specified in the **Execute** entry. **Note:** Normally, an ExeName entry for a specific EXE should appear only once in the configuration file. See [EXEs](#) on page 5-10 for more information.

IconFile– name of the program executable file that contains the icon to be displayed on the AppCenter Launch Screen.

ApprovedWindow– window titles that are approved for this program. The sequence is **{Window Title}|{Window Class}**. Since AppCenter uses the executable name as the primary match, most approved programs should specify ***|*** as the only approved window. Approved windows apply only to the approved program under which they are entered. For example, ***|*** will approve all windows for the process specified by the EXE Name setting. The wildcard characters ***** (matches any sequence of characters) and **?** (matches any one character) can be used anywhere in the window title or class name. See [Windows](#) on page 5-11 for more information.

ReadOnly– prevents modification of the approved program when AppCenter is in Administration Mode. The default value is False (disabled). See [Options](#) on page 5-14 for more information.

HideFromUser– hides the approved program from users through AppCenter User Mode. The default value is True (enabled).

HideMenuBar– hides the command bar for an approved program. The program's window is also resized to use the extra screen space. **Note:** Third party applications should be written to make use of all available screen space for the **HideMenuBar** setting to be effective. The default value is False (disabled).

HideDoneButton– hides the done (X) button of the approved program when **HideStartMenu** is enabled. The default value is False (disabled). For Windows Mobile 6.5, the done button is disabled and not actually removed from the task bar.

HideStartMenu– hides the Windows Start Menu when the approved program is running. The default value is True (enabled). For Windows Mobile 6.5, the Windows Start Menu is disabled and not actually removed from the task bar.

ShowStandardIcons– control taskbar functionality while the program is running. This setting is used in conjunction with the **HideStartMenu** setting. The default value is False (disabled).

HideSip– hides the SIP of the approved program. The default value is False (disabled). For Windows Mobile 6.5, the SIP is disabled and not removed from the task bar.

AutoStart– automatically launches an approved program when AppCenter starts. The default value is False (disabled). See [Startup](#) on page 5-19 for more information.

StartupDelay– specifies the number of seconds to wait before starting the program. This setting is used in conjunction with the **AutoStart** setting. The default value is 0.

AutoStop– closes the program when AppCenter is shutdown or restarted. The default is False (disabled). If this setting is True (enabled), AppCenter will shut down the program when AppCenter terminates. AppCenter attempts to gracefully close the program by sending the WM_CLOSE message to all top level windows owned by the program. If this action is not successful, AppCenter terminates the program. **Note:** The entry in **ExeName** for the program must be correct for **AutoStop** to successfully close the program.

RelaunchInterval– disables an approved program icon for a period of time after it has been initially tapped. This prevents a program from being launched multiple times. The **RelaunchInterval** setting may be necessary when launching programs that take a long time to initialize and load. For example, .NET Compact Framework. The default setting is 0.

RequiredIpAddress– enables the approved program if the device has a specific IP address. The settings can be used multiple times to specify multiple IP addresses. The wildcard characters * and ? can be used. For example, 192.168.1.*. When both **RequiredIpAddress** and **RequiredSSID** are used, both requirements must be met for the program to be enabled. The default setting is blank. See [Connectivity](#) on page 5-21 for more information.

RequiredSSID– enables the approved program if the device is associated to a specific access point. The settings can be used multiple times to specify multiple SSIDs. The wildcard characters * and ? can be used. For example, ABC*. When both **RequiredIpAddress** and **RequiredSSID** are used, both requirements must be met for the program to be enabled. The default setting is blank.

AddToToolsMenu– places the approved program description on the AppCenter Tools menu. If **HideFromUser** is set to True, the program appears only on the Tools menu, otherwise, the program also appears as an icon on the AppCenter screen. The menu items appear in the order that the programs are listed in the AppCenter-User Configuration File. The default value is False (disabled).

AlwaysLaunch- controls the launching of programs when accessed. By default AppCenter launches a program the first time it is tapped and caches the program's window handle. On subsequent taps, the cached window handle is brought to the foreground. This prevents multiple launches of the same program. If multiple launches are desired or a program prevents multiple launches internally, **AlwaysLaunch** should be set to True (enabled). **Note:** For Athena.exe, this option should always be set to True.

VolumeKeysAllowed– controls whether the volume hardware keys are disabled for a specific approved program. The default value is the current value of the global **Volume Keys Allowed** setting. See **Options > [Keys](#)** (Phone Devices) for more information.

This page intentionally left blank

Appendix B Sample Configuration

System Configuration Entry

To reduce icon clutter in Administration Mode, the GWES, Device, Welcome, ActiveSync, Dialup Networking, Connection Manager, CAB Files and Mobile Companion or Fusion approved program entries can be replaced with Program System entries as shown in the following sample.

Note: The Shell32 entry should be maintained as it uses different approved windows.

Program System Execute	
Program System Arguments	
Program System ExeName	gwes.exe
Program System ExeName	rnaapp.exe
Program System ExeName	connmgr.exe
Program System ExeName	device.exe
Program System ExeName	welcome.exe
Program System ExeName	nictt.exe (Mobile Companion)
Program System ExeName	wclaunch.exe (Fusion)
Program System ExeName	wceload.exe
Program System ExeName	repllog.exe
Program System ExeName	services.exe
Program System IconFile	*.exe
Program System ReadOnly	False
Program System AlwaysLaunch	False
Program System HideFromUser	True
Program System HideMenuBar	False
Program System HideDoneButton	False
Program System HideStartMenu	True
Program System HideSip	False
Program System AutoStart	False
Program System AutoStop	False
Program System StartupDelay	0
Program System RelaunchInterva	0
Program System ApprovedWindow	* *

AppCenter User Configuration File

The following is a sample AppCenter-User configuration file:

```
#
# Version 2.0 (Build 987)
#
# Taskbar Options
#
HideStartMenu           True
ShowHome                False
ShowAirBeam             False
ShowWwanSignalStrength  False
ShowSignalStrength      False
ShowBatteryLevel        False
ShowVolume              False
ShowTime                False
ShowDate                False
BatteryPercentFormat    False
ShowConnectivity        False
ShowStandardIcons       True
TaskbarTextColor        0x000000
TaskbarBackgroundColor  0x000000

#
# Title Options
#
AlternateTitle
DisplayMacAddress        False
DisplayIpAddress         False
TitleFontSize            11
TitleBold                True
AlwaysUseAppCenterTitle  False

#
# Time Options
#
24HourTimeFormat        False
RegionalTimeFormat      False
RegionalTimeOptions     2

#
# Signal Options
#
AdapterName
FusionMode               0
MobileCompanionMode     2

#
# Admin Options
#
AdminLoginDisabled       False
```

```
# Browse Options
#
BrowseFolder           "\Windows\Start Menu"
BrowseFolder           \Windows\Startup
BrowseFolder           \Windows\Programs
BrowseFolder           "\Program Files"
BrowseExtension        exe
BrowseExtension        vb
BrowseAllShortcuts     True
BrowseControlPanel     True

#
# Close Options
#
AlwaysCloseExe         always1.exe
AlwaysCloseExe         always2.exe
NeverCloseExe          never1.exe
NeverCloseExe          never2.exe

#
# Key Options
#
BlockTaskbarKey        0x00
BlockTaskbarKey        0x0D
BlockTaskbarKey        0x1B
BlockTaskbarKey        0x5B
BlockTaskbarKey        0x5C
BlockTaskbarKey        0x86
BlockTaskbarKey        0xC1
BlockTaskbarKey        0xC3
BlockTaskbarKey        0xC6
VolumeKeysAllowed      True
DisablePhoneKey        False
HideSip                True

#
# Security Options
#
DisableMemoryCardInsert False
DisableIR              False
DisableBluetooth       False
DisableActiveSync      False

#
# Phone Options
#
VoiceMailPhoneNumber
AddWwanPhoneMenu       False
ShowPhoneIcons         False
BlockIncomingCalls     False
SuppressSmsNotifications False
TodayScreenInterval    10
```

AppCenter

Windows Mobile Administrator Guide for Motorola

```
#
# Icon Options
#
AirBeamLock                False
IconsDisabledCount         0

#
# View Options
#
ViewMode                    LargeIcons
ViewTextColor               0x000000
ViewBackgroundColor        0xFFFFFFFF
ViewFontSize                12
ViewFontBold                False

#
# Approved Programs
#
Program Calculator Execute      \windows\MobileCalculator.exe
Program Calculator Arguments
Program Calculator ExeName      MobileCalculator.exe
Program Calculator IconFile     \windows\MobileCalculator.exe
Program Calculator ReadOnly     False
Program Calculator AlwaysLaunch False
Program Calculator HideFromUser False
Program Calculator HideMenuBar  False
Program Calculator HideDoneButton False
Program Calculator HideStartMenu True
Program Calculator HideSip      False
Program Calculator ShowStandardIcons False
Program Calculator AutoStart    False
Program Calculator AutoStop     False
Program Calculator AddToToolsMenu False
Program Calculator VolumeKeysAllowed True
Program Calculator StartupDelay  0
Program Calculator RelaunchInterval 0
Program Calculator ApprovedWindow *|*
Program Calculator RequiredIpAddress
Program Calculator RequiredSSID

Program Shell32 Execute
Program Shell32 Arguments
Program Shell32 ExeName          shell32.exe
Program Shell32 IconFile         *.exe
Program Shell32 ReadOnly         False
Program Shell32 AlwaysLaunch     False
Program Shell32 HideFromUser     True
Program Shell32 HideMenuBar      False
Program Shell32 HideDoneButton   False
Program Shell32 HideStartMenu    True
Program Shell32 HideSip          False
Program Shell32 ShowStandardIcons False
Program Shell32 AutoStart        False
Program Shell32 AutoStop         False
Program Shell32 AddToToolsMenu   False
```

```
Program Shell32 VolumeKeysAllowed True
Program Shell32 StartupDelay 0
Program Shell32 RelaunchInterval 0
Program Shell32 ApprovedWindow *|static
Program Shell32 ApprovedWindow *|worker
Program Shell32 ApprovedWindow *|Dialog
Program Shell32 RequiredIpAddress
Program Shell32 RequiredSSID
```

```
Program System Execute
Program System Arguments
Program System ExeName gwes.exe
Program System ExeName rnaapp.exe
Program System ExeName connmgr.exe
Program System ExeName device.exe
Program System ExeName welcome.exe
Program System ExeName wceload.exe
Program System ExeName repllog.exe
Program System ExeName services.exe
Program System IconFile *.exe
Program System ReadOnly False
Program System AlwaysLaunch False
Program System HideFromUser True
Program System HideMenuBar False
Program System HideDoneButton False
Program System HideStartMenu True
Program System HideSip False
Program System ShowStandardIcons False
Program System AutoStart False
Program System AutoStop False
Program System AddToToolsMenu False
Program System VolumeKeysAllowed True
Program System StartupDelay 0
Program System RelaunchInterval 0
Program System ApprovedWindow *|*
Program System RequiredIpAddress
Program System RequiredSSID
```

```
Program "Symbol Radio" Execute
Program "Symbol Radio" Arguments
Program "Symbol Radio" ExeName nictt.exe
Program "Symbol Radio" ExeName wclaunch.exe
Program "Symbol Radio" ExeName wcdiag.exe
Program "Symbol Radio" ExeName wcstatus.exe
Program "Symbol Radio" ExeName wcconfigd.exe
Program "Symbol Radio" IconFile *.exe
Program "Symbol Radio" ReadOnly False
Program "Symbol Radio" AlwaysLaunch False
Program "Symbol Radio" HideFromUser True
Program "Symbol Radio" HideMenuBar False
Program "Symbol Radio" HideDoneButton False
Program "Symbol Radio" HideStartMenu True
Program "Symbol Radio" HideSip False
Program "Symbol Radio" ShowStandardIcons False
Program "Symbol Radio" AutoStart False
```

AppCenter

Windows Mobile Administrator Guide for Motorola

```
Program "Symbol Radio" AutoStop           False
Program "Symbol Radio" AddToToolsMenu      False
Program "Symbol Radio" VolumeKeysAllowed   True
Program "Symbol Radio" StartupDelay         0
Program "Symbol Radio" RelaunchInterval    0
Program "Symbol Radio" ApprovedWindow      *|*
Program "Symbol Radio" RequiredIpAddress
Program "Symbol Radio" RequiredSSID
```